

Description: 5.4W Linear LED Module / 280x24mm / 12LEDs / S12 P1


This LED Module Should be Operated On:

Any LED Driver designed to Provide output Current of 150mA and Voltage 36Vdc

ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	36
NOMINAL INPUT CURRENT (mA)	150
NOMINAL POWER CONSUMPTION(W)	5.4
PCB SIZE (mm)	LINEAR 280 x 24MM
PCB MATERIAL TYPE	MCPCB
CCT	5700K / 4000K / 2700K
CALCULATED USABLE ARRAY FLUX (lm)	760 / 750 / 650
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	25
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T _c (°C)	75
BEAM ANGLE	115°
CRI (Typ)	80


MECHANICAL DATA

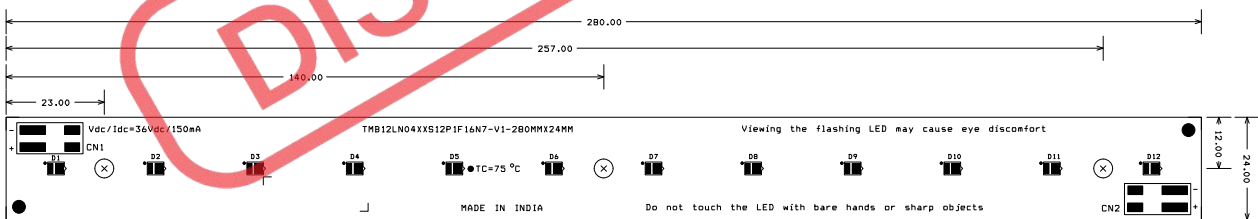

NOTE : ALL DIMENSIONS ARE IN MM

DRILL CHART				
SYM	DIAM	TOL	QTY	NOTE
x	4.000 mm		3	
TOTAL			3	

WIRING DIAGRAMS



Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.