


SPECIFICATION SHEET : NPY-120-230-T8

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,

This Ballast Will Operate Following Lamps.




F30T8 / F30T12

ELECTRICAL DATA


INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F30T8	F30T12	-	-	-	-	-	-	-
LAMPS OPERATED	2	2							
INPUT WATTS	62.36	58.63							
LINE CURRENT:	0.850	0.793							
POWER FACTOR	0.612	0.617							
BALLAST FACTOR	0.951	1.053							
EFFICACY FACTOR	1.525	1.796							
THD	125.50	122.00							
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	-								
MIN. OPERATING TEMP	0 °C (32 °F)								
MAX. CASE TEMP	75 °C (167 °F)								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

MECHANICAL DATA

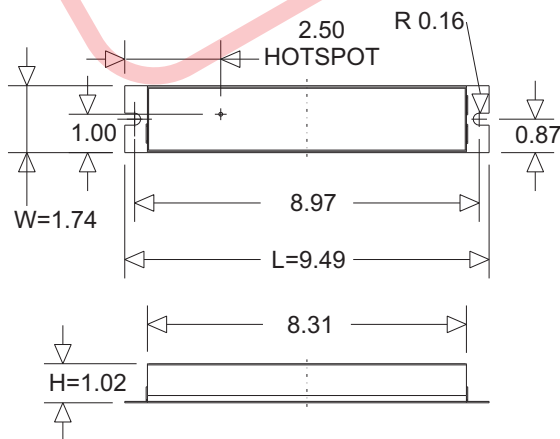

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 ± 1"	12 ± 1"	36 ± 1"	36 ± 1"	36 ± 1"	36 ± 1"

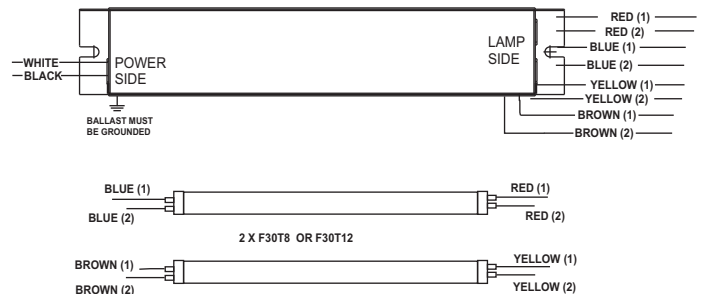

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.