

**Description:** 25.2 W Round LED Module / 70mm / 24LEDs / S6 P4


**This LED Module Should be Operated On:**

Any LED Driver designed to provide output Current of 700mA and Voltage 36Vdc

**ELECTRICAL DATA**

NOMINAL INPUT VOLTAGE (V <sub>DC</sub> )	36
NOMINAL INPUT CURRENT (mA)	700
NOMINAL POWER CONSUMPTION(W)	25.2
PCB SIZE (mm)	ROUND 70
PCB MATERIAL TYPE	MCPCB
CCT	6500K / 5700K / 4000K
CALCULATED USABLE ARRAY FLUX (lm)	2800 / 2800 / 2800
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	120
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-40 to 100
MAXIMUM T <sub>c</sub> (°C)	75
BEAM ANGLE	120°
CRI (Typ)	80

**MECHANICAL DATA**

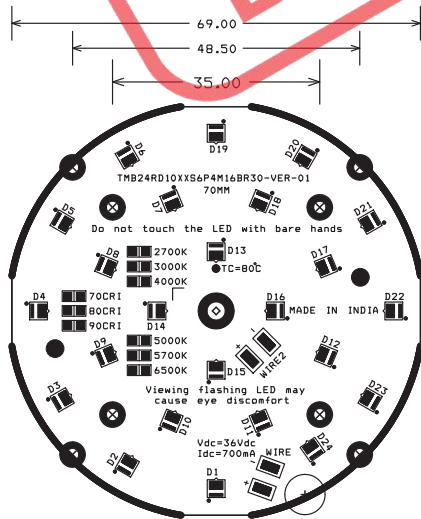


PCB SIZE-70MM ROUND

**DRILL CHART**

SYM	DIAM	TOL	QTY	NOTE
x	4.000 mm		8	
◇	5.999 mm		1	
+	6.999 mm		1	
TOTAL			10	

**WIRING DIAGRAMS**

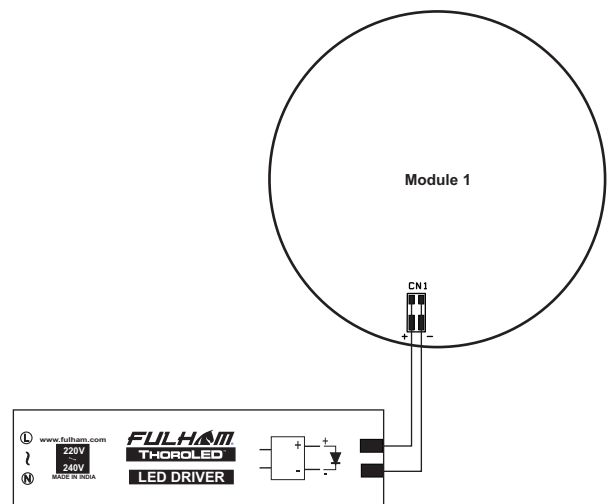

Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.