

Description: 50.4W Rectangle LED Module / 165X202MM / 24LEDs / S12P1 2Channel


This LED Module Should be Operated On:

Any LED Driver designed to provide output Current of 700mA and Voltage 36Vdc per channel.

ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	2X36
NOMINAL INPUT CURRENT (mA)	2X700
NOMINAL POWER CONSUMPTION(W)	2X25.2=50.4
PCB SIZE (mm)	RECTANGLE 165X202
PCB MATERIAL TYPE	MCPCB
CCT	5700K
CALCULATED USABLE ARRAY FLUX (lm)	2X2960=5920
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	130
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T _c (°C)	100
BEAM ANGLE	120°
CRI (Typ)	80


MECHANICAL DATA

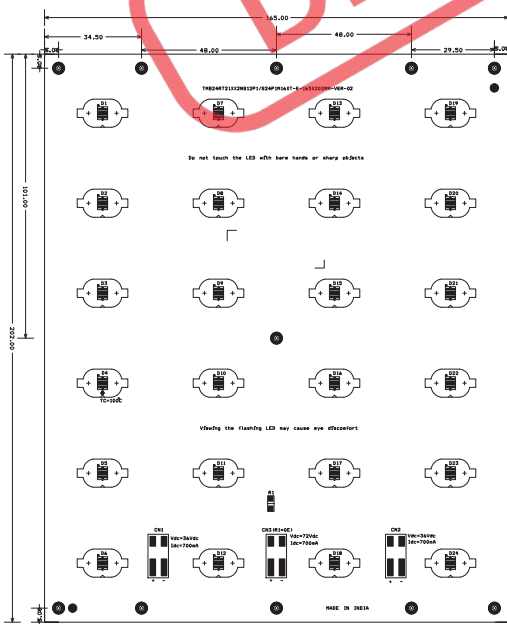

PCB SIZE-165X202MM

DRILL CHART			
SYM	DIAM	TOL	QTY
+	1.950	mm	48
o	4.000	mm	11
TOTAL			59

WIRING DIAGRAMS

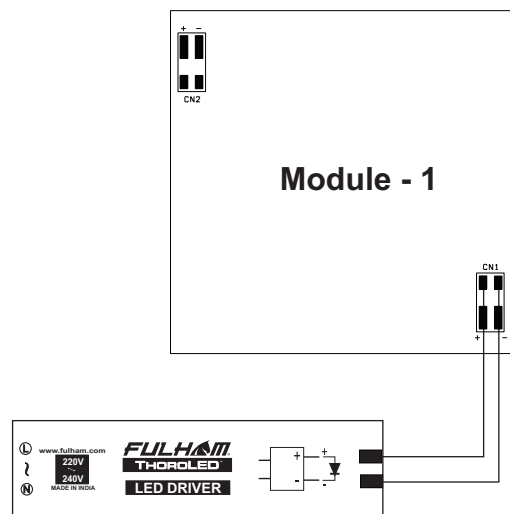

Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.