

Description: 21 W Square LED Module / 120mm / 42LEDs / S7 P6


This LED Module Should be Operated On:

Any LED Driver designed to provide output Current of 500mA and Voltage 42Vdc

ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	42
NOMINAL INPUT CURRENT (mA)	500
NOMINAL POWER CONSUMPTION(W)	21
PCB SIZE (mm)	Square 120X120
PCB MATERIAL TYPE	FR-4
CCT	6500K / 5700K / 4000K
CALCULATED USABLE ARRAY FLUX (lm)	3100 / 3100 / 3100
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	80
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-40 to 100
MAXIMUM T _c (°C)	75
BEAM ANGLE	120°
CRI (Typ)	80


MECHANICAL DATA

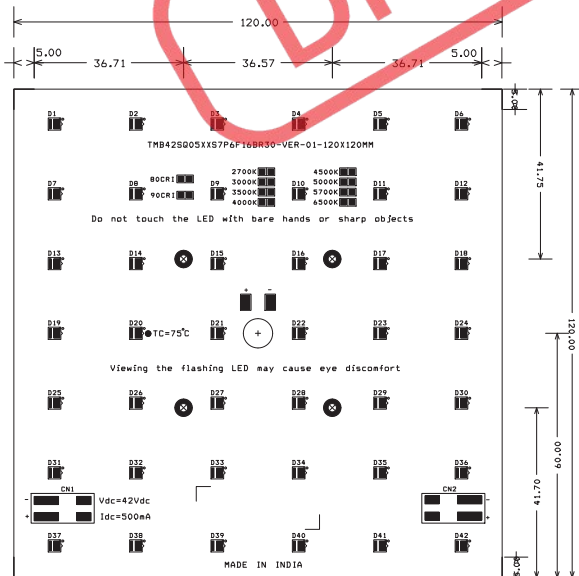

PCB SIZE-120X120MM
PANEL SIZE-240X240MM

DRILL CHART				
SYM	DIAM	TOL	QTY	NOTE
x	4.000 mm		4	
+	6.999 mm		1	
TOTAL			5	

WIRING DIAGRAMS

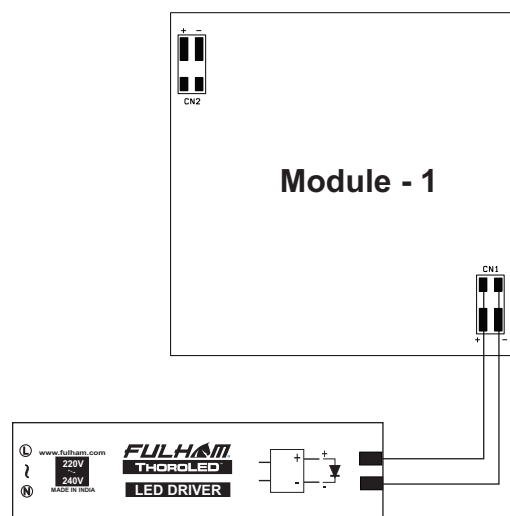

Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.