


**SPECIFICATION SHEET : WHCG6-127-T12-RS-L**

This Is An Original Product From Fulham Electronic Co., Ltd

**Description : WORKHORSE Commercial Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Series Lamp Operation, THD Less Than 25%**

**This Ballast Will Operate Following Lamps.**




**F18T8 / F20T12/ F36T8/ F40T12**

**ELECTRICAL DATA**


INPUT VOLT: 127V ± 10%, 50/60Hz						
LAMP WATTS/TYPE	F18 T8		F20 T12		F36 T8	F40 T12
LAMPS OPERATED	1	2	1	2	1	1
INPUT WATTS	-	36W	-	36W	34W	-
MAX. LINE CURRENT	-	0.279A	-	0.284A	0.264A	-
POWER FACTOR	>0.85					
BALLAST FACTOR	0.9					
EFFICIENCY	>88%					
THD	<25%					
CURRENT CREST FACTOR	< 1.7					
EMI/RFI COMPLIANCE	-					
SOUND RATING	-					
BALLAST TYPE	RAPID START					
VOLTAGE TRANSIENTS	-					
INPUT/PROTECTION	FUSE					
OUTPUT/PROTECTION	EOL					
MIN. OPERATING TEMP	- 10 °C ( 14 ° F )					
MAX. CASE TEMP	75 °C ( 167 ° F )					
ENERGY STAR 4.0	-					
APPROVALS/CLASS	-					

**MECHANICAL DATA**

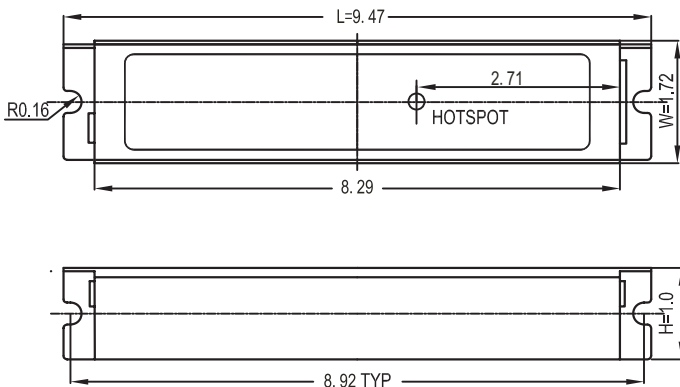

Where : L = Length, W = Width, H = Height

**WIRING DIAGRAMS**

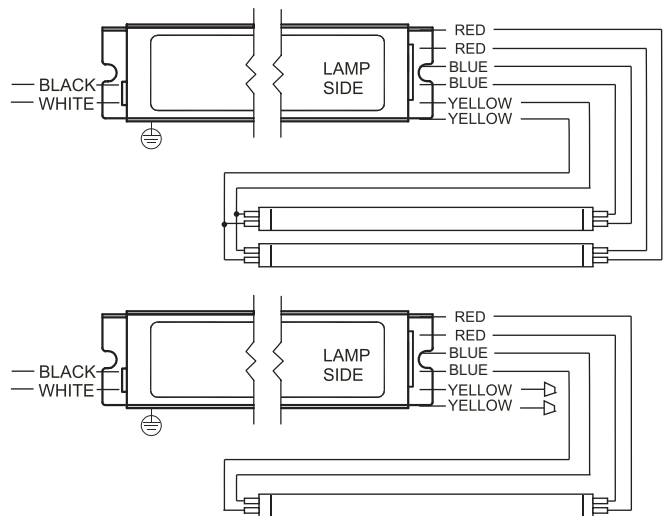

**NOTE : This Ballast Must Be Grounded**

Fulham Electronic Co., Ltd extends limited warranty only to the original purchaser or to the first user for the period of 3 years from the date of manufacture when properly installed and under normal conditions of use.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM ELECTRONIC Co.,LTD RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave. , Hawthorne CA 90250, U. S. A Tel.:323-599-5001 Website: www.fulham.com