

- Constant Voltage LED Driver
- Output Wattage: 75W
- Nominal Input Voltage: 240Vac, 50Hz
- Output Current: 3125mA
- CRCA with Wires
- Output voltage range of 24Vdc \pm 3%
- Suitable For Dry and Damp Locations
- Surge Immunity 5KV
- 440Vac application @ 8Hrs
- OVP and UVP Cut-off
- IP 54

General Specifications

Rated Input Voltage	150-280Vac, 50 Hz
Operating Input Voltage Range	120-300Vac, 50 Hz
Input Current	0.82A Max @ 120Vac, 0.41 A Max @ 240Vac
Input Power	93W Max @ Rated I/P voltage at Max Load
Power Factor	>0.95 (@ Full Load at Rated Voltage)
THD	<10% (@ Full Load at Rated Voltage)
Efficiency	>85% Typical
Driver Type	Constant Voltage
Output Current	3125mA Max
Output Voltage Range	24Vdc \pm 3%
Output Power	75W Max
Number of Output Channels	1 Channel
Output Type	Class I
Ambient Operating Temperature Range	-10°C to 55°C
Max. Case Temperature	85°C
Input Surge Protection	L-N-5KV, L-N-E-5KV
Protections	Input Over Current : Non Resettable (Fuse) Input Over Voltage : Shutdown @ >325Vac, Auto recovery @ 300-315Vac, @ Ambient Temp. 440Vac for 8 hours @ 35°C, 320Vac for 48 hours @ 50°C Input Under Voltage : Shutdown <95Vac, Auto recovery 105Vac \pm 10V Output Short Circuit : Auto Recovery (HICCUP Mode) Continuous Output Open Circuit : YES Output to Ground short: YES Output Overload : YES (HICCUP MODE) Over Temperature : HICCUP Mode
Service Life	50,000 Hours @ 70° Tc
Approvals / Class	SELV Equivalent ; Dry and Damp Locations
Warranty	03 YEARS
Weight	0.650 KG

Note : The usage of a compatible* SPD is mandatory for outdoor application.

Figure 1

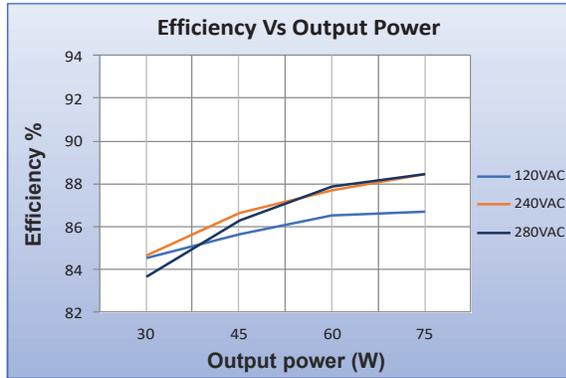


Figure 2



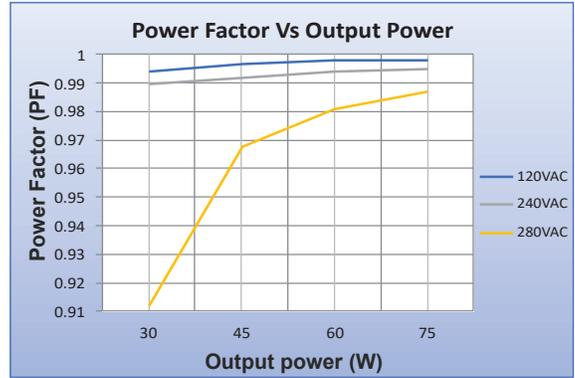


Figure 3

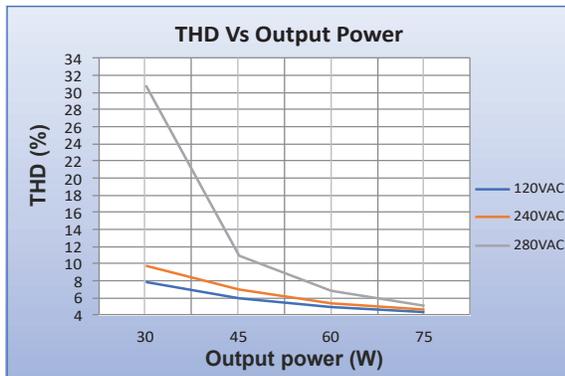

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **03 years @ Tc 85°C** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.


Mechanical Data

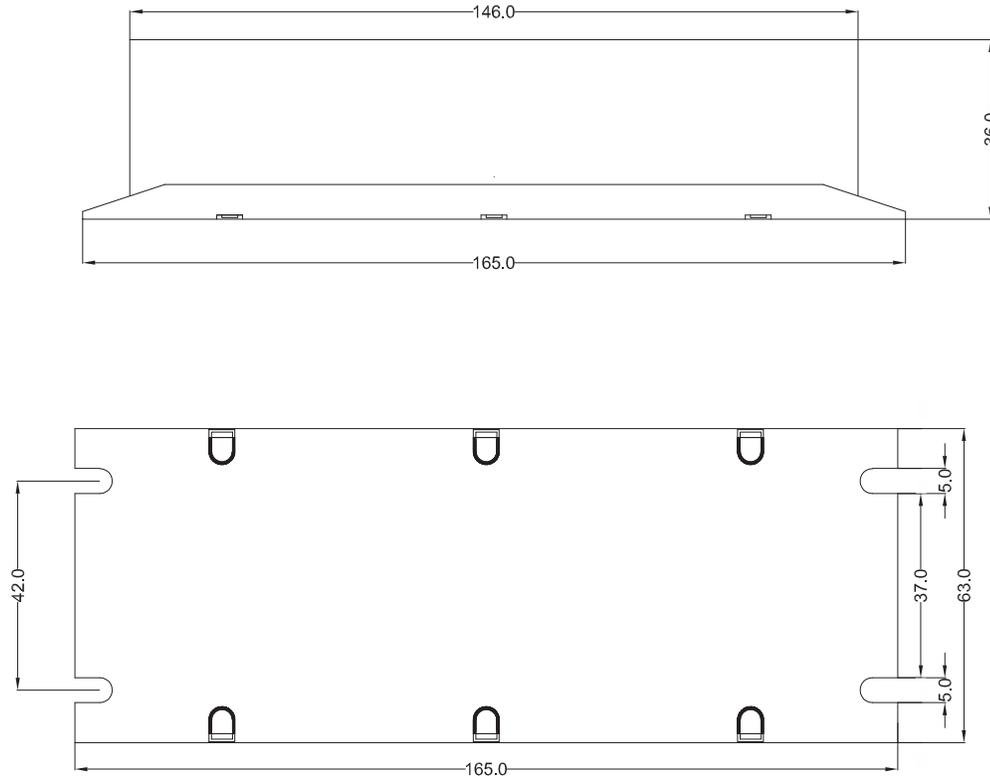

Note : All Dimensions are in mm.

Tolerance=±0.5mm

Wiring Diagrams

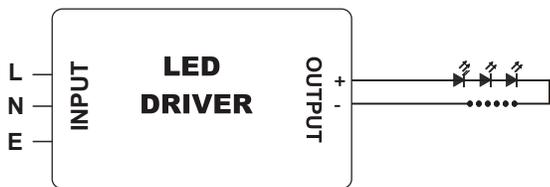

INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH
BLACK	300 mm	RED	250 mm
WHITE	300 mm	BLUE	250 mm
GREEN	300 mm	Output Wire Gauge 16SWG	

Note: This Driver Must Be Grounded

Installation Instructions:

Connect Wires as per details given on the Driver Screen. Keep proper ventilation around the LED Driver and do not stack any object on it. Also a 10-15 cm clearance must be kept when the adjacent device is a heat source. Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.