




## FHEM16RH



## Micro Adjustable LED Square-Head Remote Lamps

- 12 LED assembly for use in areas requiring remote lighting
- Energy saving LED
- For indoor and outdoor applications
- High impact resistant thermoplastic housing
- Single and double remote lamps
- Each lamp head is used as part of an emergency lighting system
- Compatible with FHEM16, FHEX20, FHEC33 and FHEC35 series<sup>1</sup>
- Each lamp head is fully adjustable and glare-free
- Recommended Max Mounting Distance <20ft using 18 gauge wire \*

eneral Specifications	FHEM16RH13V1	FHFM16RH13V2
	THEWHORTHSVI	FILMIONITISVZ
Input Power	0.92W	1.84W
Input Voltage	3.6V	3.6V
Number of Heads	1	2
Overall Size	FHEM16RH13V1: 5.5" L x 4.4" H x 3.4" W	
	FHEM16RH13V2: 7.8" L x 4.4" H x 3.2" W	
Emergency Operation	90 minutes	
Compliance	UL 924 Listed	
	Damp Location	
Warranty	5 years from the date of manufacture	

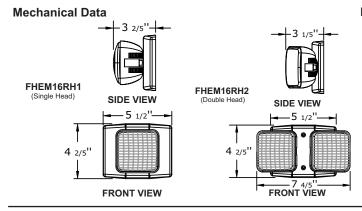

## **Lamp Data**

- FHEM16RH13V1 3.6V, 0.92W Square LED Lamp Heads
- FHEM16RH13V2 3.6V, 1.84W Square LED Lamp Heads

**Part Number Matrix** 

<u>FireHorse</u>

**Emergency Luminaire** 

Model Number

RH=Remote Head

Number of Heads 1 = 1 Head 2 = 2 Heads

Voltage Wattage Per Head 3V = 3.6Volts1 = 0.92W

Compatible Series are UL Listed with Remote Heads

If you exceed the recommended wiring distance noticeable lumen loss will occur