

**Description:** 17W Constant Current LED Driver, Single Channel, 15-24V, 0.7A ( Non Dimmable )

**This Driver Will Operate The Following LED Modules:**

Any LED module designed to accept 700mA and a voltage of 15-24VDC.

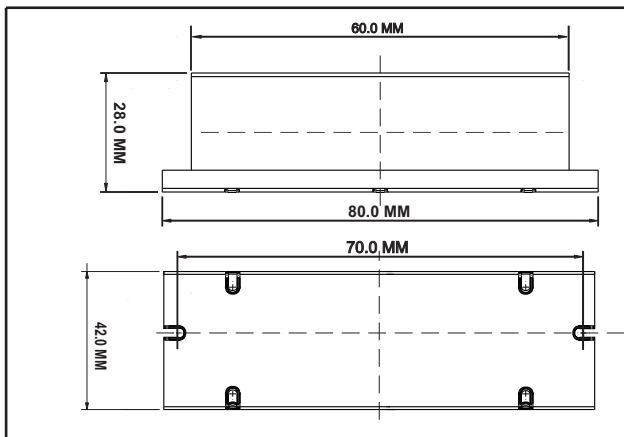
**ELECTRICAL DATA**

RATED INPUT VOLTAGE	240 Vac
OPERATING INPUT VOLTAGE RANGE	70Vac~300Vac, 50Hz
OPTIMUM PERFORMANCE INPUT VOLTAGE RANGE	216Vac~254Vac, 50Hz
INPUT CURRENT (MAX)	0.083A
POWER FACTOR	0.98
Athd	10%
EFFICIENCY	84%
CONSTANT CURRENT, VOLTAGE OR POWER	Constant Current
OUTPUT CURRENT	700mA
OUTPUT VOLTAGE	15~24 Vdc
OUTPUT WATTAGE	17W
NUMBER OF OUTPUT CHANNELS	1
EMI	N.A.
DIMMING CONTROLLER TYPE	N.A.
DIMMING RANGE	N.A.
MAX. CASE HOT SPOT TEMPERATURE (Tc MAX.)	70°C
OPERATING TEMPERATURE	-25°C to 50°C
APPROVALS CLASS (CONFORMING TO)	SELV Equivalent, IP62
PROTECTION AGAINST REVERSE CONNECTED LED LOAD	YES
CASE MATERIAL	METAL (CRCA POWDER COATED)

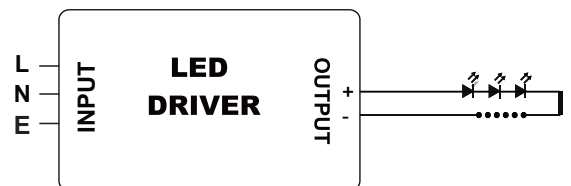
**CIRCUIT PROTECTION**

SURGE PROTECTION	: Line-Neutral 4kV, Line & Neutral-Earth 4kV
INPUT OVER CURRENT PROTECTION	: NON-RESETTABLE
INPUT OVER VOLTAGE	: APPLICATION @ 320VAC 48Hrs. & @ 360VAC 2Hrs.
INPUT UNDER VOLTAGE	: N.A.
OUTPUT SHORT CIRCUIT PROTECTION	: AUTORECOVERY (HICCUP MODE)
OUTPUT OPEN CIRCUIT PROTECTION	: AUTORECOVERY (HICCUP MODE)
OUTPUT TO GROUND SHORT PROTECTION	: YES
OUTPUT OVERLOAD PROTECTION	: YES
OVER TEMPERATURE PROTECTION	: N.A.

Note: All performance specified at Rated voltage and full load. Output current tolerance: ±5%

**MECHANICAL DATA**

**WIRING DIAGRAMS**

INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH
BLACK	309 mm	RED	309 mm
WHITE	309 mm	BLUE	309 mm
GREEN	309 mm	Output wire with Terminal: N. A.	


**Installation Instructions:** Keep proper ventilation around the LED Driver and do not stack any object on it. Also a 10-15 cm clearance must be kept when the adjacent device is a heat source. Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.

 Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com)) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.