


- Built-in LED Driver
- U-OUT 60V
- IP65 Dry and Damp
- Suitable for Class I luminaire
- Universal Voltage: 120-277V~, 50/60Hz
- Output voltage range of 10-57 V $\ddot{=}$
- Output Power: 60W Max.
- Output Current: 500-2100mA
- Programmable LED Driver
- 0-10V Dimming
- Customizable Dimming Curve
- Linear Case and Cable

This Driver Will Operate The Following LED Modules: Any LED module designed to accept input voltage range of 10- 57 V $\ddot{=}$  and can operate up to current of 500-2100mA.

**General Specifications**

Input Voltage	120-277V~, 50/60 Hz
Input Current	0.6A Max.
Input Power	72W
Power Factor	>0.95
THD	<20%
Efficiency	89% Typical
Driver Type	Constant Current
Output Current	500-2100mA Programmable; See Label for Set Current; To Program Use R-SET (Figure 1) or TPSB100 (Programmer); Record New Setting On 1" x 0.5" Label
Output Voltage Range	10-57V $\ddot{=}$
Output Power	60W Max.
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	0-10VDC / 100%-1%, 0% (Figure 1)
RFI/EMI	FCC Part 15B Consumer, EN55015
Output Type	LED Class 2
Potting Type / Degree of Fill	Potting As Per ASTM D36-86 / Fully Potted
Ambient Operating Temperature Range	-40°C to 60°C (-40°F to 140°F)
Max. Case Temperature	90°C (194°F)
Sound Rating	A
Input Surge Protection	Line-Neutral 10kV, Line & Neutral-Ground 10kV
Input Current Protection	
Output Short Circuit Protection	
Output Open Circuit Protection	
Output to Ground Short Protection	
Overload Protection	
Over Temperature Protection	
Service Life	50,000 hours @Tc 80°C (176°F)
Approvals / Class	Dry or Damp Locations
Warranty	5 years

**Mechanical Data**

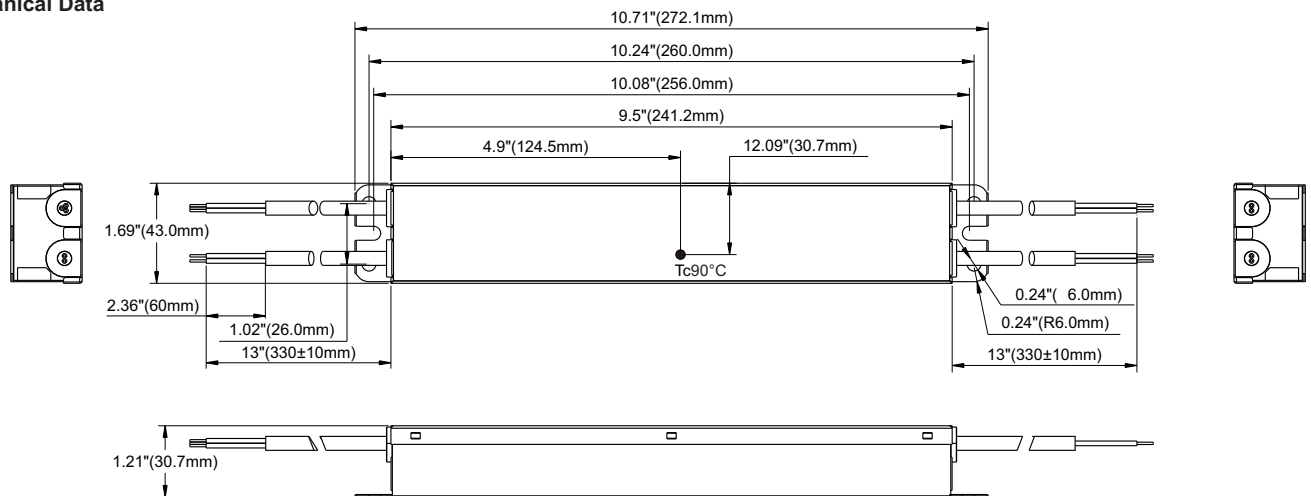

Case Tolerance=±0.02"

Fulham extends a limited warranty to the original purchaser or first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. The usage of appropriate series connected Surge Protection Device (SPD) is required in high risk applications. For complete terms and conditions, please refer to the Warranty Center at [www.fulham.com](http://www.fulham.com). Specifications subject to change without notice.



Wiring Diagrams 1




NOTE: This driver has six mounting holes, three on each side.  
Need to mount four round holes or two semiround holes.

**A** Mounting the LEDdriver

INPUT 120-277V~  
DIMMING +  
0-10VDC -

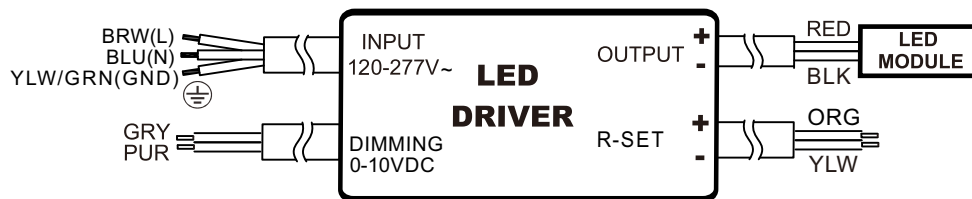

INPUTSIDE	LENGTH
BRW&BLU&YLW/GRN	330mm[13"]
GRY&PUR	330mm[13"]



OUTPUTSIDE	LENGTH
RED&BLK	330mm[13"]
ORG&YLW	330mm[13"]

**NOTE :**

- 1.This Driver Must Be Installed By A Licensed Electrician
- 2.This Driver Must Be Grounded

**B** Making the wire connections

Fulham Head Quarters:  
Fulham Co., Inc  
12705 South Van Ness Ave.  
Hawthorne, CA 90250  
Local: (323) 779-2980, Fax: (323) 754-9060

Manufacturer:  
North China  
Fulham Electronic Co. Ltd.  
No. 9 Xingchang Road, Nanshao Zhen Changping Science Park, Beijing, P.R. China

Fulham extends a limited warranty to the original purchaser or first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. The usage of appropriate series connected Surge Protection Device (SPD) is required in high risk applications. For complete terms and conditions, please refer to the Warranty Center at [www.fulham.com](http://www.fulham.com). Specifications subject to change without notice.