

**Description:** 7W Linear LED Module / 260x24mm / 6LEDs / S6 P1


**This LED Module Should be Operated On:**

Any LED Driver designed to Provide output Current of 350mA and Voltage 20Vdc

**ELECTRICAL DATA**


NOMINAL INPUT VOLTAGE (V <sub>DC</sub> )	20
NOMINAL INPUT CURRENT (mA)	350
NOMINAL POWER CONSUMPTION(W)	7
PCB SIZE (mm)	LINEAR 260 x 24MM
PCB MATERIAL TYPE	MCPCB
CCT	4500K / 3000K / 2700K
CALCULATED USABLE ARRAY FLUX (lm)	650 / 620 / 590
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	50
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T <sub>c</sub> (°C)	75
BEAM ANGLE	115°
CRI (Typ)	80

**MECHANICAL DATA**

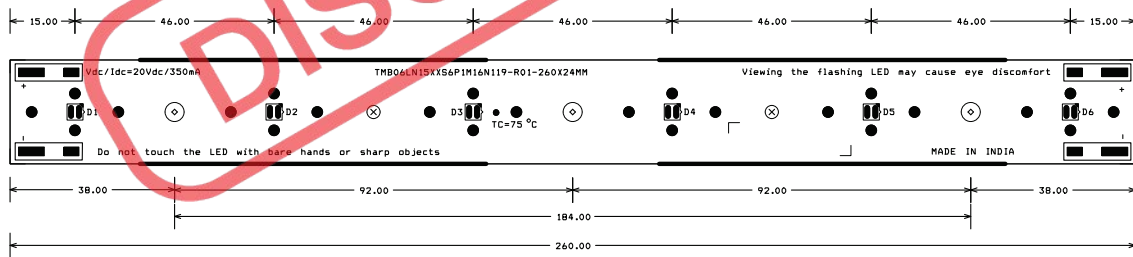

SYM	DIAM	TOL	QTY	NOTE
x	2.500 mm		26	
o	4.000 mm		9	
TOTAL			35	

**WIRING DIAGRAMS**



Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.