

Description: 10W Linear LED Module / 280x24mm / 22LEDs / S11 P2


This LED Module Should be Operated On:

Any LED Driver designed to Provide output Current of 300mA and Voltage 33Vdc

ELECTRICAL DATA


NOMINAL INPUT VOLTAGE (V _{DC})	33
NOMINAL INPUT CURRENT (mA)	300
NOMINAL POWER CONSUMPTION(W)	10
PCB SIZE (mm)	LINEAR 280 x 24MM
PCB MATERIAL TYPE	MCPCB
CCT	5700K / 4000K / 2700K
CALCULATED USABLE ARRAY FLUX (lm)	1400 / 1370 / 1190
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	45
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	- 35 to 50
MAXIMUM T _c (°C)	75
BEAM ANGLE	115°
CRI (Typ)	70

MECHANICAL DATA

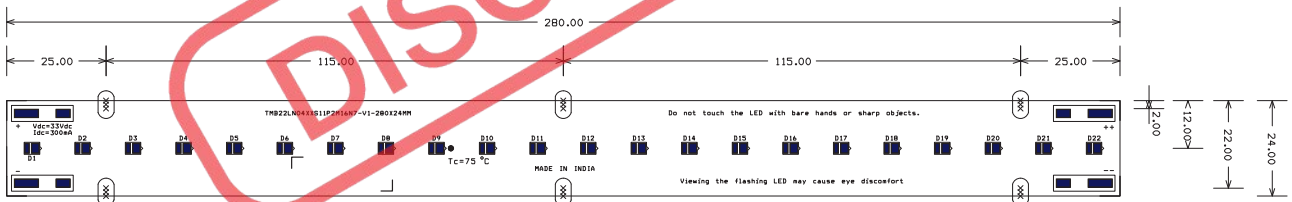

SYM	DIAM	TOL	QTY	NOTE
x	4.000 mm		18	
TOTAL			18	

WIRING DIAGRAMS



Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.