

**Description:** 5.25W Square LED Module / 60x60mm / 30LEDs / S5 P6


**This LED Module Should be Operated On:**

Any LED Driver designed to Provide output Current of 350mA and Voltage 15Vdc

**ELECTRICAL DATA**

NOMINAL INPUT VOLTAGE (V <sub>DC</sub> )	15
NOMINAL INPUT CURRENT (mA)	350
NOMINAL POWER CONSUMPTION(W)	5.25
PCB SIZE (mm)	SQUARE 60 x 60MM
PCB MATERIAL TYPE	FR-4
CCT	6500K / 4000K / 2700K
CALCULATED USABLE ARRAY FLUX (lm)	680 / 650 / 590
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	30
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T <sub>c</sub> (°C)	75
BEAM ANGLE	115°
CRI (Typ)	70

**MECHANICAL DATA**

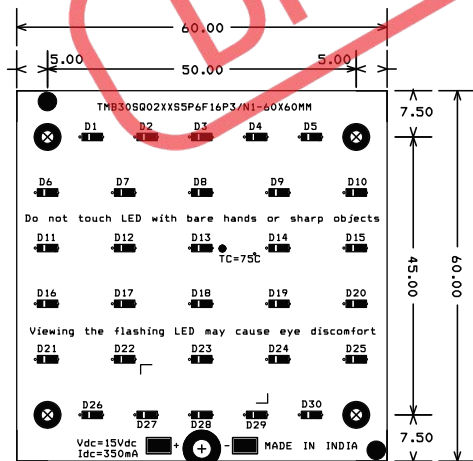


ALL DIMENSIONS ARE IN MM

**DRILL CHART**

SYM	DIAM	TOL	QTY	NOTE
x	4.000 mm		4	
+	5.999 mm		1	
TOTAL			5	

**WIRING DIAGRAMS**

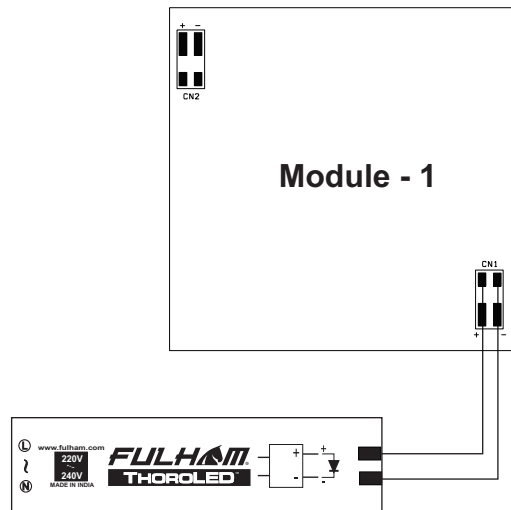

Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.