

Description: 67.2W Rectangle LED Module / 194X234mm / 32LEDs / S32 P1


This LED Module Should be Operated On:

Any LED Driver designed to provide output Current of 700mA and Voltage 96Vdc

ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	96
NOMINAL INPUT CURRENT (mA)	700
NOMINAL POWER CONSUMPTION(W)	67.2
PCB SIZE (mm)	RECTANGLE 194X234
PCB MATERIAL TYPE	MCPCB
CCT	5700K
CALCULATED USABLE ARRAY FLUX (lm)	7890
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	150
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T _c (°C)	100
BEAM ANGLE	120°
CRI (Typ)	80


MECHANICAL DATA

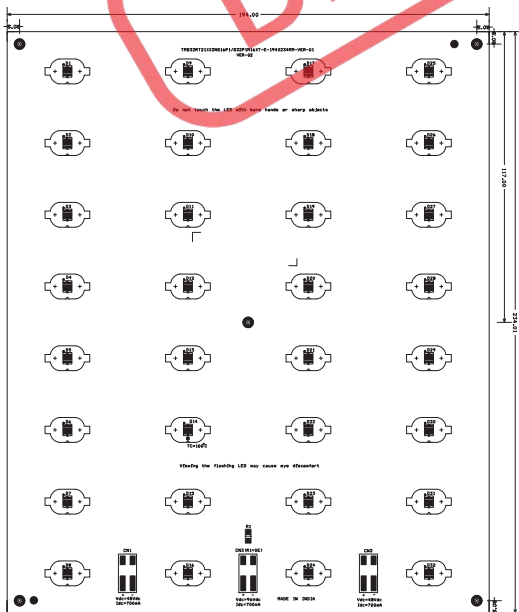

PCB SIZE-194X234MM

DRILL CHART				
SYM	DIAM	TOL	DTY	NOTE
+	1.950 mm		64	
-	4.000 mm		5	
	TOTAL		69	

WIRING DIAGRAMS

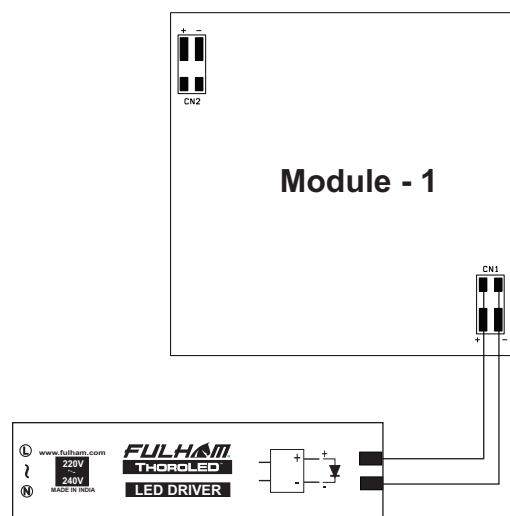

Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.