

**Description:** 10W Linear LED Module / 560x24mm / 33LEDs / S11 P3


**This LED Module Should be Operated On:**

Any LED Driver designed to Provide output Current of 300mA and Voltage 33Vdc

**ELECTRICAL DATA**

NOMINAL INPUT VOLTAGE (V <sub>DC</sub> )	33
NOMINAL INPUT CURRENT (mA)	300
NOMINAL POWER CONSUMPTION(W)	10
PCB SIZE (mm)	LINEAR 560 x 24MM
PCB MATERIAL TYPE	FR-4
CCT	6500K / 5700K / 5000K
CALCULATED USABLE ARRAY FLUX (lm)	1410 / 1410 / 1460
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	40
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T <sub>c</sub> (°C)	75
BEAM ANGLE	115°
CRI (Typ)	80


**MECHANICAL DATA**

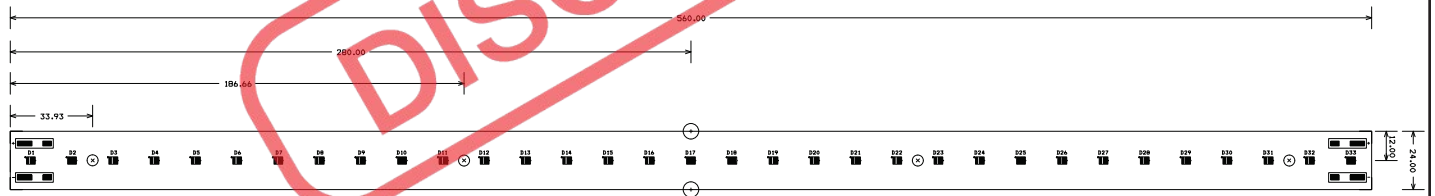

NOTE-ALL DIMENSIONS ARE IN MM

SYM	DIAM	TOL	QTY	NOTE
-	4.000 mm		4	
+	5.999 mm		2	
	TOTAL		6	

**WIRING DIAGRAMS**



Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.**