

**Description:** 151W Rectangle LED Module / 320x190mm / 72LEDs / S36 P1 2Channel


**This LED Module Should be Operated On:**

Any LED Driver designed to Provide output Current of 700mA and Voltage 108Vdc per Channel


**ELECTRICAL DATA**

NOMINAL INPUT VOLTAGE (V <sub>DC</sub> )	2x108
NOMINAL INPUT CURRENT (mA)	2x700
NOMINAL POWER CONSUMPTION(W)	2x75.5=151
PCB SIZE (mm)	RECTANGLE 320 x 190MM
PCB MATERIAL TYPE	MCPCB
CCT	5000K
CALCULATED USABLE ARRAY FLUX (lm)	2x9360=18720
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	250
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T <sub>c</sub> (°C)	100
BEAM ANGLE	115°
CRI (Typ)	80

**MECHANICAL DATA**

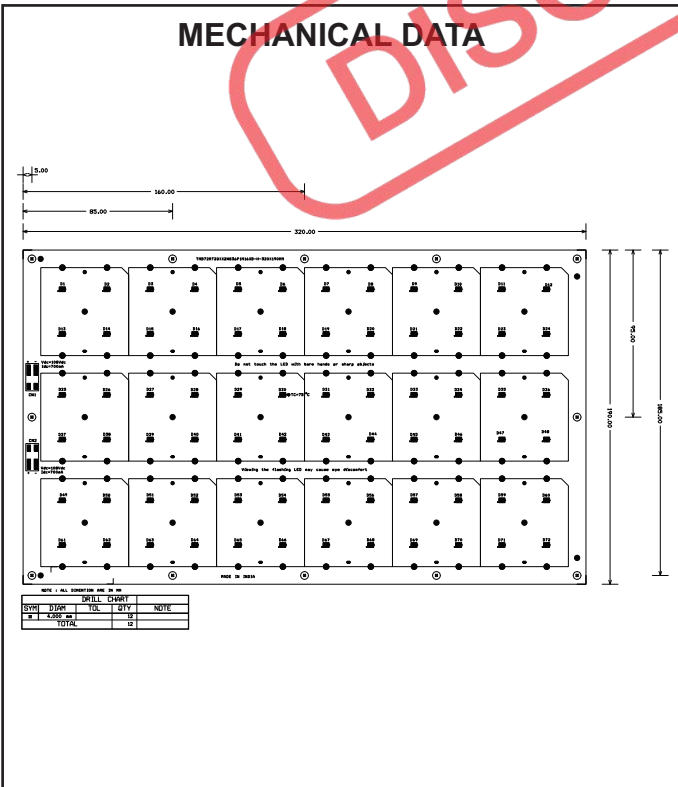

**WIRING DIAGRAMS**

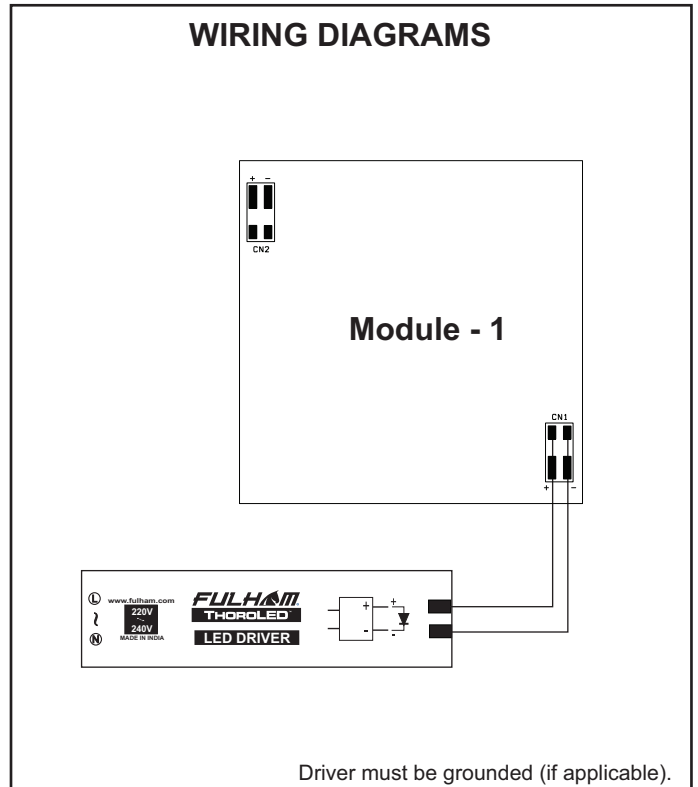

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.**