Discontinued
Contact Fulham for availability. Not for use in new designs.

RoHS COMPLIANT

c UL us LISTED

CWH33-120-L

Instant Start Fluorescent Ballast

- Solid State Electronic Ballast
- Input Voltage: 120VAC, 60Hz
- Instant Start
- cULus Listed, Class ”P”, 1 or 2 Outdoor

General Specifications

Input Voltage	120VAC ±10%, 60Hz
EMI / RFI Compliance	FCC Part 18-A (Non-Consumer)
Sound Rating	” A ”
Ballast Type	Instant Start
Voltage Transients	ANSI 62.41
Input Protection	Fuse
Min. Operating Temp	-30°C (-20°F)
Max. Case Temp	70°C (158°F)
Approvals Class	cULus Listed, Class ”P”, 1 or 2 Outdoor
Warranty	5 Years from the date of manufacture when properly installed

Electrical Data

Lamp Wattage / Type	Lamps Operated	Input Wattage	Line Current	Power Factor	Ballast Factor	Efficacy Factor	THD
F15T8	2	33	0.29	0.94	1.05	3.20	31%
F15T8	3	42	0.37	0.95	0.87	2.06	29%
F17T8	3	51	0.44	0.95	0.97	1.90	28%
F15T8	4	53	0.46	0.96	0.86	1.62	28%

Mechanical Data

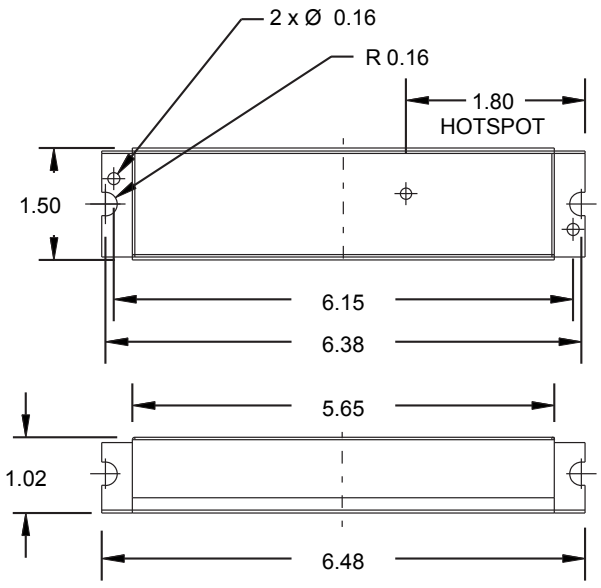

Where : L = Length, W = Width, H = Height

Wiring Diagrams

Wire Color	Length (Inches)
Black	12” ±1”
White	12” ±1”
Red	36” ±1”
Yellow	36” ±1”

Wiring configurations vary depending on the lamp type.
Please refer to Fulham’s Wiring Diagram Finder in the link below:

https://www.fulham.com/contact-us/wiring-diagrams/

Fulham Co. Inc.: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-779-2980 Fax.: 1-323-754-9060. order@fulham.com www.fulham.com
Specifications subject to change without notice.