

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Model No.: \_\_\_\_\_


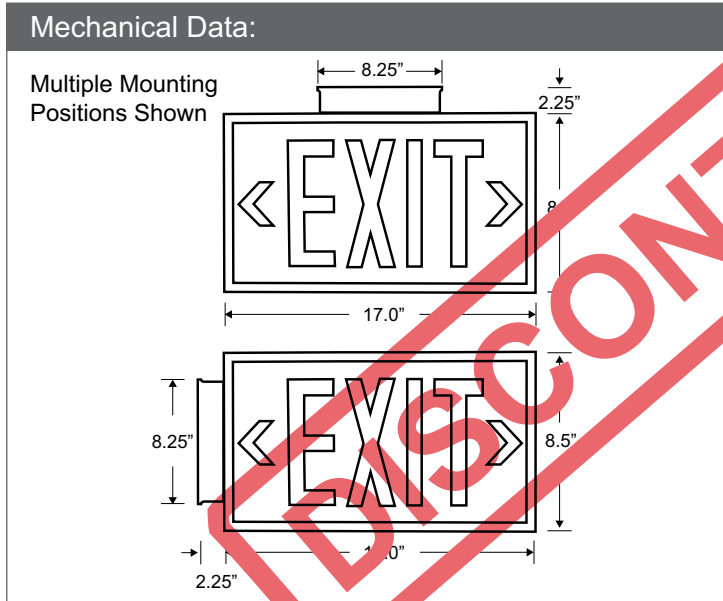
Remarks: \_\_\_\_\_

**Specifications:**

NO additional electrical or mechanical source required. Before installation it must be determined that there is a minimum of 5 Fc of fluorescent light on the face(s) of the sign at all times during building occupancy.

Approvals:  
Meets NFPA Life Safety Code 101 and OSHA  
Meets International Building and Fire Codes  
Listed through UL 924 for the USA and Canada

**Listings & Certifications:**

- Standard Features:**
- Requires No Additional Electricity To Operate
  - Non-Toxic, Non-Radioactive
  - Use For Both High Level And Low Location Applications
  - Requires Virtually No Maintenance, Periodic Inspections, For 25 Plus Years
  - Thin, Low Profile Construction
  - Consistent, Uniform Illumination
  - Visible At 50 Feet In Total Blackout
  - Saves On Energy Costs
  - Vandal Resistant Polycarbonate Face Panel
  - Field Directional Chevron Indicators
  - LEED Points Qualified
  - Can Be Relocated If Path Of Egress Changes
  - Polycarbonate Face Panel/Aluminum Frame With Photoluminescent Lettering
  - Designed For Surface, Flag And Ceiling Mount With Optional Frame And Mounting Bracket.

Base Model No.	Number of Faces	Background Color	Frame Color
FLPL51	S - Single	R - Red	B - Black
			R - Red
		G - Green	G - Green
	D - Dual	B - Black	S - Silver Powder Coat
			W - White

Build part number by adding Base Model No., one of each Number of Faces, Background Color and Frame Color. Example: FLPL51-D-G-S

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**