


SPECIFICATION SHEET: LH5-120-L


This Is An Original Product From Fulham Co., Inc.

Description: LongHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/277V 50/60Hz.

This Ballast Will Operate Following Lamps:



F54T5HO/F25T8 F40/30T12




CFQ26W

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz

LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR
CFQ26W	4	88	0.79	0.8	0.9
F40T12	2	94	0.84	1.3	1.4
F30T12	2	78	0.70	1.3	1.6
F6012HO	1	64	0.56	0.8	1.3
F54T5HO	2	112	0.97	1.0	0.9
POWER FACTOR	> 0.9				
THD	< 40 %				
EMI/RFI COMPLIANCE	FCC PART 18-A				
SOUND RATING	" A "				
BALLAST TYPE	INSTANT START				
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993				
INPUT/PROTECTION	FUSE				
REMOTE MOUNTING	20ft Max.				
MIN. OPERATING TEMP	- 30 °C (- 22 °F)				
MAX. CASE TEMP	70 °C (158 °F)				
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR				

MECHANICAL DATA

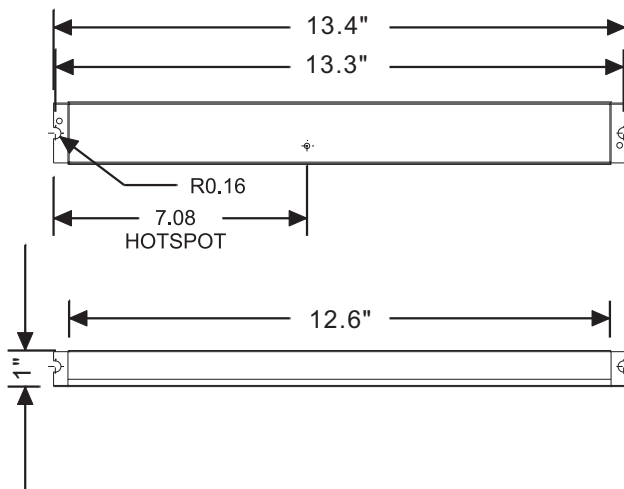

Where: L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH-INCHES	12±1"	12±1"	24±1"	-	24±1"	-

**WIRING DIAGRAMS DEPEND
ON THE LAMP TYPE.
PLEASE REFER TO FULHAM'S CATALOG.**

NOTE: This Ballast Must Be Grounded.