

SPECIFICATION SHEET : NPY-120-432-T8B

This Is An Original Product From Fulham Co., Inc



Description : PONY Series, High Frequency Electronic, Instant Start Ballast, Normal PF

This Ballast Will Operate Following Lamps.

F17T8/ F25T8 / F32T8

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F17T8	F25T8	F32T8	F17T8	F25T8	F32T8	-	-	-
LAMPS OPERATED	3			4					
INPUT WATTS	48.57	69.31	87.90	58.69	85.66	107.60			
LINE CURRENT:	0.70	0.96	1.18	0.83	1.17	1.45			
POWER FACTOR	> 0.5								
BALLAST FACTOR	1.12	0.943	0.925	1	0.896	0.86			
EFFICACY FACTOR	2.306	1.360	1.052	1.414	1.050	0.779			
THD	< 150								
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	INSTANT START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUZE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	0 °C (32 ° F)								
MAX. CASE TEMP	75 °C (167 ° F)								
ENERGY STAR 4.0	-								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

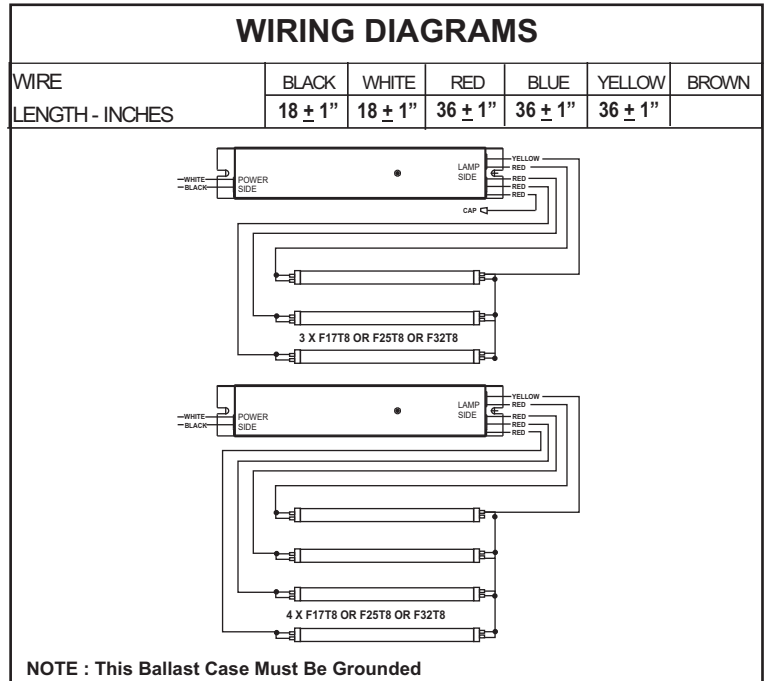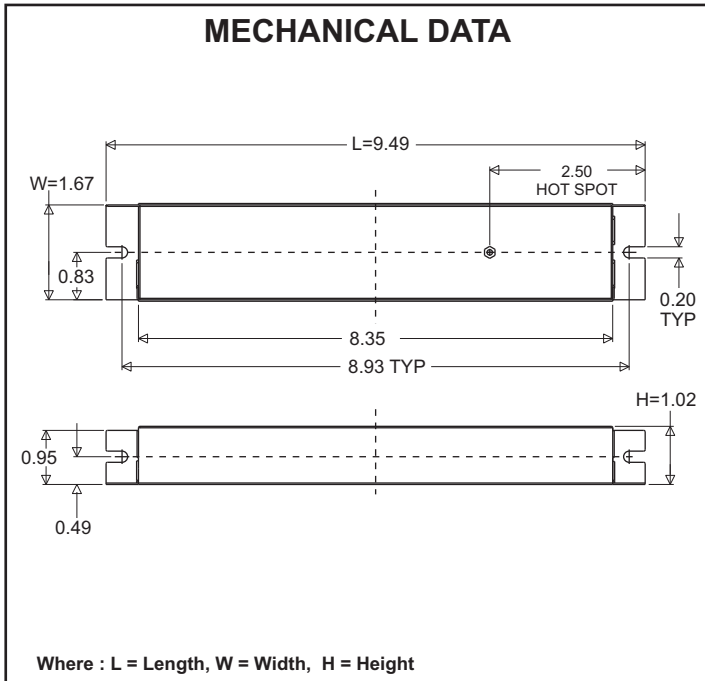

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.