


SPECIFICATION SHEET : **SC-120-287-CUV**

This Is An Original Product From Fulham Co., Inc

**Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,
* Meets Energy Star 4.0 Criteria For Applications Listed.**

This Ballast Will Operate Following Lamps.




180mm T5 UV / 287mm T5 UV

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz								
LAMP WATTS/TYPE	180mm T5 UV	287mm T5 UV	-	-	-	-	-	-
LAMPS OPERATED	1	1						
INPUT WATTS	11.66	15.61						
LINE CURRENT:	0.225	0.278						
POWER FACTOR	0.432	0.466						
BALLAST FACTOR	0.927	0.960						
EFFICACY FACTOR	7.953	6.148						
THD	200.00	179.60						
CURRENT CREST FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	RAPID START							
VOLTAGE TRANSIENTS	ANSI 62.41							
INPUT/PROTECTION	FUSE							
OUTPUT/PROTECTION	EOL							
MIN. OPERATING TEMP	0 °C (32 °F)							
MAX. CASE TEMP	75 °C (167 °F)							
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OUTDOOR							


MECHANICAL DATA

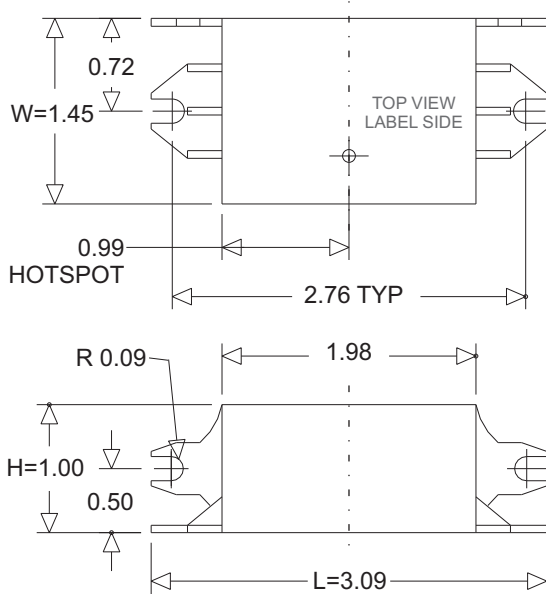

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 ± 1"	12 ± 1"	8 ± 1"	8 ± 1"		

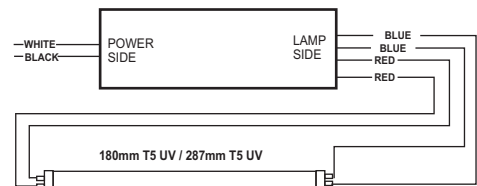

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.