



SPECIFICATION SHEET : T1UNV024V-60L

This Is An Original Product From Fulham Co., Inc

IP66




Description : Independent direct current power supply. High efficiency and reduced weight and size. Constant output voltage. Wide range input 100 ~ 277 Volt. Power output up to 60 Watts.

This Driver Will Operate Following LED Modules:
Any Series or Parallel string of LED's designed for 24V Constant Voltage Input.

ELECTRICAL DATA


| | |
|------------------------------------|---|
| INPUT VOLT | 100V ~ 277V ± 10%, 50/60Hz |
| POWER FACTOR (PF) | > 0.90 |
| THD | < 20% |
| EFFICIENCY | > 85% @ 120VAC |
| SURGE PROTECTION | YES |
| CURRENT PROTECTION | YES |
| CONSTANT CURRENT, VOLTAGE OR POWER | CONSTANT VOLTAGE |
| OUTPUT CURRENT | 2.5A |
| OUTPUT VOLTAGE | 24V |
| OUTPUT SHORT CIRCUIT PROTECTION | YES |
| OUTPUT OPEN CIRCUIT PROTECTION | YES |
| OUTPUT TO GROUND SHORT PROTECTION | YES |
| OVER LOAD PROTECTION | YES |
| OVER TEMPERATURE PROTECTION | N/A |
| MAX. CASE HOT SPOT TEMPERATURE | 90 °C |
| MIN. POSSIBLE AMBIENT TEMPERATURE | -40 °C |
| MAX. POSSIBLE AMBIENT TEMPERATURE | 60 °C |
| APPROVAL/CLASS | Class 2 (8750 & 879), Damp location, FCC Part 15 Class B, Type HL |

MECHANICAL DATA

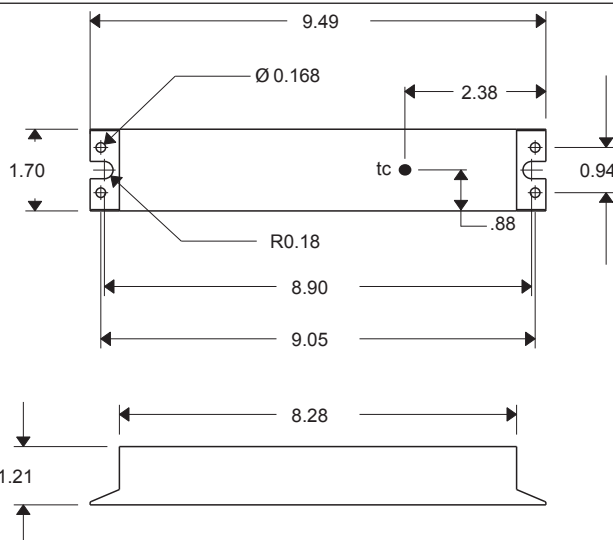

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

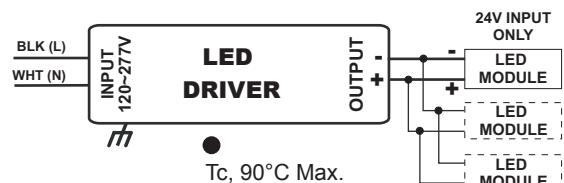

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.