

Holiday Overstock Sale

Save 10% on popular LED, Fluorescent, and Emergency/Exit products!

www.fulham.com

**ON
SALE
NOW**

For a limited time, Fulham is offering a 10% discount on a wide range of products. View the full product list on the following pages, then contact your RSM or email us at order@fulham.com to place an order.

But act fast: your order must be received by December 21st and ship by December 28th. Order quantity limited to supply in stock.

LED Drivers

Programmable models,
0-10V / TRIAC / DALI models,
multi-channel, 347V input



LED Retrofit Kits

DC and DirectAC, round and rectangular,
range of wattages




Fluorescent Ballasts

WorkHorse, RaceHorse,
UV/Tanning ballasts,
FireHorse emergency ballasts,
LongHorse remote mount models,
Pony compact models



LED Modules

Linear, up to 22", various CCTs

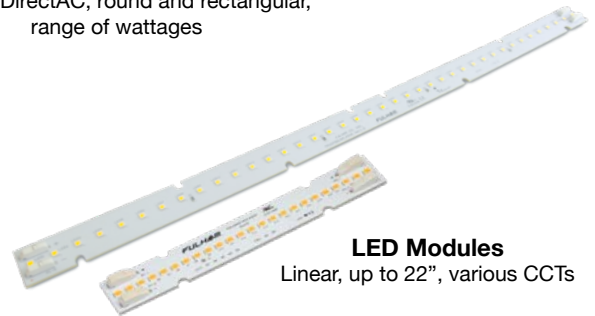

T5 fluorescent lamps



Exit signs



Fulham 2018 Holiday Overstock Sale

Orders must be received by December 21st. Contact Fulham for pricing

Model Number	Description
LED Drivers	
T1120012V-60LE	ThoroLED - Single Channel - LED Driver - 120V Input - 12V DC Constant Voltage Output - 60W Max - IP64
T1A1UNV105P-40E	WorkHorse LED - Single Channel - DALI Dimming LED Driver - Universal Voltage Input - Programmable 250-1050mA Constant Current Output - 40W Max - Linear Case w/ End Terminals - IP60
T1A1UNV105P-60E	WorkHorse LED - Single Channel - DALI Dimming LED Driver - Universal Voltage Input - Programmable 250-1050mA Constant Current Output - 60W Max - Linear Case w/ End Terminals - IP60
T1A1UNV105P-60G	WorkHorse LED - Single Channel - DALI Dimming LED Driver - Universal Voltage Input - Programmable 250-1050mA Constant Current Output - 60W Max - Compact Case w/ End Terminals and backside Studs - IP60
T1A1UNV140P200L	WorkHorse LED Extreme - Single Channel - DALI Dimming LED Driver - Universal Voltage Input - Programmable 500-1400mA Constant Current Output - 200W Max - Linear Case w/ End Terminals - IP65
T1A1UNV150P-40L	WorkHorse LED Extreme - Single Channel - DALI Dimming LED Driver - Universal Voltage Input - Programmable 250-1500mA Constant Current Output - 40W Max - Linear Case w/ End Terminals - IP65
T1A1UNV150P100C	WorkHorse LED Extreme - Single Channel - DALI Dimming LED Driver - Universal Voltage Input - Programmable 500-1500mA Constant Current Output - 100W Max - Compact Case w/ End Terminals - IP65
T1A1UNV150P150L	WorkHorse LED Extreme - Single Channel - DALI Dimming LED Driver - Universal Voltage Input - Programmable 500-1500mA Constant Current Output - 150W Max - Linear Case w/ End Terminals - IP65
T1A1UNV210P-60L	WorkHorse LED Extreme - Single Channel - DALI Dimming LED Driver - Universal Voltage Input - Programmable 500-2100mA Constant Current Output - 60W Max - Linear Case w/ End Terminals - IP65
T1M13470350-15V	ThoroLED - Single Channel - 0-10V Dimming LED Driver - 347 Volt Input - 350mA Constant Current Output - 15W Max - Compact Case w/ Bottom Leads & Mounting Studs - IP64
T1M13470700-40V	ThoroLED - Single Channel - 0-10V Dimming LED Driver - 347 Volt Input - 700mA Constant Current Output - 40W Max - Compact Case w/ Bottom Leads & Mounting Studs - IP64
T1M13471050-40C	ThoroLED - Single Channel - 0-10V Dimming LED Driver - 347 Volt Input - 1,050mA Constant Current Output - 40W Max - Compact Case w/ Side Leads - IP64
T1M1UNV0350-15F	ThoroLED - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - 350mA Constant Current Output - 15W Max - 21-42 VDC - Compact Case w/ Terminals - IP60
T1M1UNV0700-30F	ThoroLED - 0-10V Dimming LED Driver - Universal Voltage Input - 700mA Constant Current Output - 30W Max - 42VDC
T1M1UNV0700-40V	ThoroLED - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - 700mA Constant Current Output - 40W Max - 18-58 VDC - Compact Case w/ Bottom Leads & Mounting Studs - IP64
T1M1UNV070028BL	ThoroLED - 0-10V Dimming LED Driver - Universal Voltage Input - 700mA Constant Current Output - 28W Max - 12 - 40VDC
T1M1UNV076042L	ThoroLED - 0-10V Dimming LED Driver - Output Wattage: 42W - Long Case and Wires - Universal Voltage: 120V-277VAC - 50/60Hz - Output voltage range of 30-54VDC
T1M1UNV1050150L	ThoroLED - 0-10V Dimming LED Driver - Output Wattage:150W - Long Case and Wires - Universal Voltage: 120V-277VAC - 50/60Hz - Output voltage range of 71-142VDC
T1M1UNV105P-60G	WorkHorse LED - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - Programmable 250-1050mA Constant Current Output - 60W Max - Compact Case w/ Terminals and backside studs - IP60
T1M1UNV140P200L	WorkHorse LED Extreme - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - Programmable 500-1400mA Constant Current Output - 200W Max - Linear Case w/ End Terminals - IP65
T1M1UNV150P100C	WorkHorse LED Extreme - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - Programmable 500-1500mA Constant Current Output - 100W Max - Compact Case w/ End Terminals - IP65
T1M1UNV150P150L	WorkHorse LED Extreme - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - Programmable 500-1500mA Constant Current Output - 150W Max - Linear Case w/ End Terminals - IP65
T1M1UNV1680-88L	ThoroLED - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - 1680mA Constant Current Output - 74W Max - 21-44 VDC - Long case w/ Side Leads - IP64
T1M1UNV1800-88L	ThoroLED - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - 1800mA Constant Current Output - 79.2W Max - 21-44VDC -Long Case w/ Side Leads - IP64
T1M1UNV2400-98L	ThoroLED - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - 2400mA Constant Current Output - 98W Max - 30-41 VDC - Long Case w/Side Leads - IP64
T1M1UNV500P-185L	WorkHorse LED Extreme - Single Channel - 0-10V Dimming LED Driver - Universal Voltage Input - Programmable 500-1500mA Constant Current Output - 185W Max - Linear Case w/ End Terminals - IP64
T1R1UNV140P200L	WorkHorse LED Extreme - Single Channel - 802.15.4 (Tilight) Wireless Dimming LED Driver - Universal Voltage Input - Programmable 500mA to 1400mA Constant Current Output - 200W Max - Linear Case w/ End Terminals - IP65

Fulham 2018 Holiday Overstock Sale

Orders must be received by December 21st. Contact Fulham for pricing

Model Number	Description
T1R1UNV150P150L	WorkHorse LED Extreme - Single Channel - 802.15.4 (Tvilight) Wireless Dimming LED Driver - Universal Voltage Input - Programmable 500mA to 1500mA Constant Current Output - 150W Max - Linear Case w/ End Terminals - IP65
T1T11200700-30L	ThoroLED - Single Channel - Triac Dimming LED Driver - 120V Input - 700mA Constant Current Output - Max 30W - ROHS Compliant - Linear Case - IP64
T1T11200700-9C	ThoroLED - Single Channel - Triac Dimming LED Driver - 120V Input - 700mA Constant Current Output - Max 9W - ROHS Compliant - Compact Case
T1T1120070018CA	ThoroLED - Single Channel - Triac Dimming LED Driver - 120V Input - 700mA Constant Current Output - Max 18W - ROHS Compliant - Compact Case - IP64
T1UNV024V-150L	ThoroLED - Single Channel - LED Driver - Universal Voltage Input - 24V DC Constant Voltage Output - 150W Max - IP67 - ROHS Compliant
T1UNV0700-40C	ThoroLED - Single Channel - LED Driver - Universal Voltage Input - 700mA Constant Current Output - Max 40W - Compact Case - IP64
TC11200350-6C	ThoroLED - Single Channel - LED Driver - 120V Input - 350mA Constant Current Output - Max 6W - Compact Case - IP62
TCD11200350-11C	ThoroLED - Single Channel - Triac Dimming LED Driver - 120V Input - 350mA Constant Current Output - Max 11W - Compact Case
TCD11200650-18C	ThoroLED - Single Channel - Triac Dimming LED Driver - 120V Input - 650mA Constant Current Output - Max 18W - Compact Case
TCD4UNV0300-34L	ThoroLED - Four Channel - 0-10V Dimming LED Driver - Universal Voltage Input - 300mA Constant Current Output - Max 34W

LED Retrofit Kits and Engines

TEMUNV025RD5001	Vizion - 120VAC / Universal Input Round LED DC Engines and LED DC Engine Retrofit Kits - TRIAC/ELV - 25W - 5000K - 120° beam angle - 80, 90 CRI - 9" diameter x 1.2" H - ROHS Compliant - 2305 Lumens - 120 lm/W
TET120013HR2701	Vizion - 120VAC / Universal Input Half Round LED DC Engines and LED DC Retrofit Kits - TRIAC/ELV - 80,90 CRI - 2700K - 120° beam angle - Ø 7" (R3.5") x 0.945" H - RoHS Compliant - 1345 lumens - 113 lm/W
TET120013HR5001	Vizion - 120VAC / Universal Input Half Round LED DC Engines and LED DC Retrofit Kits - TRIAC/ELV - 80,90 CRI - 5000K - 120° beam angle - Ø 7" (R3.5") x 0.945" H - RoHS Compliant - 1345 lumens - 113 lm/W
TET120013RD4001	Vizion - 120VAC / Universal Input Round LED DC Engines and LED DC Retrofit Kits - TRIAC/ELV - 80 CRI - 4000K - 120° beam angle - 7" diameter x 0.945" H - RoHS Compliant - 1075 lumens - 113 lm/W
TET120013RD5001	Vizion - 120VAC / Universal Input Round LED DC Engines and LED DC Retrofit Kits - TRIAC/ELV - 80 CRI - 5000K - 120° beam angle - 7" diameter x 0.945" H - RoHS Compliant - 1075 lumens - 113 lm/W
TET120021RD4001	Vizion - 120VAC / Universal Input Round LED DC Engines and LED DC Retrofit Kits - TRIAC/ELV - 80 CRI - 4000K - 120° beam angle - 9" diameter x 1.2" H - RoHS Compliant - 2305 lumens - 120 lm/W
TET120021RD5001	Vizion - 120VAC / Universal Input Round LED DC Engines and LED DC Retrofit Kits - TRIAC/ELV - 80 CRI - 4000K - 120° beam angle - 9" diameter x 1.2" H - RoHS Compliant - 2305 lumens - 120 lm/W
TET120025RD3001	Vizion - 120VAC / Universal Input Round LED DC Engines and LED DC Retrofit Kits - TRIAC/ELV - 80 CRI - 3000K - 120° beam angle - 9" diameter x 1.2" H - RoHS Compliant - 2605 lumens - 110 lm/W
TET120025RD5001	Vizion - 120VAC / Universal Input Round LED DC Engines and LED DC Retrofit Kits - TRIAC/ELV - 80 CRI - 5000K - 120° beam angle - 9" diameter x 1.2" H - RoHS Compliant - 2605 lumens - 110 lm/W
TJT120010AC940B	Vizion - AC Input DirectAC LED Engine Retrofit Kit - TRIAC Dimmable - 120V Input - 10W - 90CRI - 4000K - 120° beam angle - MCPCB - 3.12" Diameter x .6"H - RoHS Compliant - 785 lumens - 79 lm/W - w 5VA lens
TJT120015AC930B	Vizion - AC Input DirectAC LED Engine Retrofit Kit - TRIAC Dimmable - 120V Input - 15W - 90CRI - 3000K - 120° beam angle - MCPCB - 5.1" Diameter x .56"H - RoHS Compliant - 1,415 lumens - 94 lm/W - w 5VA lens
TJT120015AC940B	Vizion - AC Input DirectAC LED Engine Retrofit Kit - TRIAC Dimmable - 120V Input - 15W - 90CRI - 4000K - 120° beam angle - MCPCB - 5.1" Diameter x .56"H - RoHS Compliant - 1,495 lumens - 100 lm/W - w 5VA lens
TJT120023AC827B	Vizion - AC Input DirectAC LED Engine Retrofit Kit - TRIAC Dimmable - 120V Input - 23W - 80CRI - 2700K - 120° beam angle - MCPCB - 6.95" Diameter x .56"H - RoHS Compliant - 2,215 lumens - 96 lm/W - w 5VA lens
TJT120023AC835B	Vizion - AC Input DirectAC LED Engine Retrofit Kit - TRIAC Dimmable - 120V Input - 23W - 80CRI - 3500K - 120° beam angle - MCPCB - 6.97" diameter x 0.81" H - RoHS Compliant - 2,330 lumens - 101 lm/W - w 5VA lens
TJT120034AC927B	Vizion - AC Input DirectAC LED Engine Retrofit Kit - TRIAC Dimmable - 120V Input - 34W - 90CRI - 2700K - 120° beam angle - MCPCB - 9.53" Diameter x .79"H - RoHS Compliant - 2,825 lumens - 83 lm/W - w 5VA lens
TJT120034AC930B	Vizion - AC Input DirectAC LED Engine Retrofit Kit - TRIAC Dimmable - 120V Input - 34W - 90CRI - 3000K - 120° beam angle - MCPCB - 9.53" Diameter x .79"H - RoHS Compliant - 2,965 lumens - 87 lm/W - w 5VA lens
TJT120034AC940B	Vizion - AC Input DirectAC LED Engine Retrofit Kit - TRIAC Dimmable - 120V Input - 34W - 90CRI - 4000K - 120° beam angle - MCPCB - 9.53" Diameter x .79"H - RoHS Compliant - 3,135 lumens - 92 lm/W - w 5VA lens

Fulham 2018 Holiday Overstock Sale

Orders must be received by December 21st. Contact Fulham for pricing

Model Number	Description
TJTUNV010AC827B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 10W - 80CRI - 2700K - 120° beam angle - MCPCB - 6.5" Circle x .78" H - RoHS Compliant - 955 lumens - 96 lm/W
TJTUNV010AC930B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 10W - 90CRI - 3000K - 120° beam angle - MCPCB - 6.5" Circle x .78" H - RoHS Compliant - 865 lumens - 87 lm/W
TJTUNV015AC827B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 15W - 80CRI - 2700K - 120° beam angle - MCPCB - 6.5" Circle x .78" H - RoHS Compliant - 1505 lumens - 100 lm/W
TJTUNV015AC930B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 15W - 90CRI - 3000K - 120° beam angle - MCPCB - 6.5" Circle x .78" H - RoHS Compliant - 1365 lumens - 91 lm/W
TJTUNV015AR830B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 15W - 80CRI - 3000K - 120° beam angle - MCPCB - Rectangular 7.4" L x 4.0" W x 0.71" H - RoHS Compliant - 1630 lumens - 109 lm/W
TJTUNV015AR835B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 15W - 80CRI - 3000K - 120° beam angle - MCPCB - Rectangular 7.4" L x 4.0" W x 0.71" H - RoHS Compliant - 1630 lumens - 109 lm/W
TJTUNV015AR840B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 15W - 80CRI - 3500K - 120° beam angle - MCPCB - Rectangular 7.4" L x 4.0" W x 0.71" H - RoHS Compliant - 1630 lumens - 109 lm/W
TJTUNV015AR930B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 15W - 80CRI - 4000K - 120° beam angle - MCPCB - Rectangular 7.4" L x 4.0" W x 0.71" H - RoHS Compliant - 1725 lumens - 115 lm/W
TJTUNV023AC835B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 23W - 80CRI - 3500K - 120° beam angle - MCPCB - 9.5" Circle x .78" H - RoHS Compliant - 2400 lumens - 104 lm/W
TJTUNV023AC930B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 23W - 90CRI - 3000K - 120° beam angle - MCPCB - 9.5" Circle x .78" H - RoHS Compliant - 2065 lumens - 90 lm/W
TJTUNV034AC850B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 34W - 80CRI - 5000K - 120° beam angle - MCPCB - 10" Circle x .78" H - RoHS Compliant - 3685 lumens - 108 lm/W
TJTUNV034AC930B	Vizion - AC Direct Drive LED Kit - UNV Input - Triac Dimming - 5VA lens - 34W - 90CRI - 3000K - 120° beam angle - MCPCB - 10" Circle x .78" H - RoHS Compliant - 2995 lumens - 88 lm/W
TKT120013RD4001	Vizion - UL Classified LED Retrofit Kit - Constant Current - 350mA - Triac Dimming - Round Shape -120V - 13W - 4000K - 40 LED's - (7" diameter x 1.25" H) - 1450 Lumens - ROHS Compliant - 80 CRI - w/ dual connector
TKT120013RT2706	Vizion - UL Classified LED Retrofit Kit - Constant Current - 350mA - Triac Dimming - Rectangular Shape -120V - 13W - 2700K - 40 LED's - (4" x 7" x 1.22" H) - 1260 Lumens - ROHS Compliant - 80 CRI - w/ dual connector
TKT120013RT5006	Vizion - UL Classified LED Retrofit Kit - Constant Current - 350mA - Triac Dimming - Rectangular Shape -120V - 13W - 5000K - 40 LED's - (4" x 7" x 1.22" H) - 1550 Lumens - ROHS Compliant - 80 CRI - w/ dual connector
TKT120021RD2701	Vizion - UL Classified LED Retrofit Kit - Constant Current - 700mA - Triac Dimming - Round Shape -120V - 21W - 2700K - 64 LED's - (9" diameter x 1.75" H) - 2020 Lumens - ROHS Compliant - 80 CRI - w/ dual connector
TKT120025RD3001	Vizion - UL Classified LED Retrofit Kit - Constant Current - 700mA - Triac Dimming - Round Shape -120V - 21W - 3000K - 64 LED's - (9" diameter x 1.75" H) - 2160 Lumens - ROHS Compliant - 80 CRI - w/ dual connector
TKT120025RD3501	Vizion - UL Classified LED Retrofit Kit - Constant Current - 700mA - Triac Dimming - Round Shape -120V - 25W - 3500K - 80 LED's - (9" diameter x 1.75" H) - 2785 Lumens - ROHS Compliant - 80 CRI - w/ dual connector
LED Modules	
TM40RD0540-201	Vizion - 40 LED Module - Round Shape - 7" diameter x 0.22" H - 4000K - 80CRI - 500 mA - Standard
TM80RD0550-201	Vizion - 80 LED Module - Round Shape - 7" diameter x 0.22" H - 5000K - 80CRI - 1050 mA - Standard
TMU040003EL835A	Vizion - 6 LED Module - Linear Shape - FR4 - 0.71" x 1.5" - 3W - 3500K - 80CRI - 400 mA (Max) Constant Current - w/ dual connector
TMU040003EL850A	Vizion - 6 LED Module - Linear Shape - FR4 - 0.71" x 1.5" - 3W - 5000K - 80CRI - 400 mA (Max) Constant Current - w/ dual connector
TMU040005EL827A	Vizion - 12 LED Module - Linear Shape - FR4 - 0.94" x 1.5" - 5W - 2700K - 80CRI - 400 mA (Max) Constant Current - w/ dual connector
TMU040005EL835B	Vizion - 12 LED Module - Linear Shape - FR4 - 0.71" x 5" - 5W - 3500K - 80CRI - 400 mA (Max) Constant Current - w/ dual connector
TMU040005EL930B	Vizion - 12 LED Module - Linear Shape - FR4 - 0.71" x 5" - 5W - 3000K - 90CRI - 350 mA (Max) Constant Current - w/ dual connector
TMU040008EL850A	Vizion - 18 LED Module - Linear Shape - FR4 - 0.71" x 5" - 8W - 5000K - 80CRI - 400 mA (Max) Constant Current - w/ dual connector
TMU040010EL850B	Vizion - 24 LED Module - Linear Shape - FR4 - 0.71" x 11" - 10W - 5000K - 80 CRI - 400 mA (Max) Constant Current - w/ dual connector
TMU040010EL850C	Vizion - 24 LED Module - Linear Shape - FR4 - 0.71" x 17" - 10W - 5000K - 80 CRI - 400 mA (Max) Constant Current - w/ dual connector

Fulham 2018 Holiday Overstock Sale

Orders must be received by December 21st. Contact Fulham for pricing

Model Number	Description
TMU040015EL850A	Vizion - 24 LED Module - Linear Shape - FR4 - 0.71" x 17" - 15W - 5000K - 80 CRI - 400 mA (Max) Constant Current - w/ dual connector
TMU045015HL827A	Vizion - Linear Shape - 15W - 2700K - 80 CRI - 450mA - Constant Current - 22" x 0.94" x 0.24" - w/ On-board connector
TMU045015HL827B	Vizion - Linear Shape - 15W - 2700K - 80 CRI - 450mA - Constant Current - 22.88" x 0.94" - w/ On-board connector
TMU045015HL830A	Vizion - Linear Shape - 15W - 3000K - 80 CRI - 450mA - Constant Current - 22" x 0.94" x 0.24" - w/ On-board connector
TMU045015HL850A	Vizion - Linear Shape - 15W - 3000K - 80 CRI - 450mA - Constant Current - 22" x 0.94" x 0.24" - w/ On-board connector
TMU045018HL827A	Vizion - Linear Shape - 13.5W - 2700K - 80 CRI - 450mA - Constant Current - 22" x 0.94" - w/ On-board connector
TMU045018HL827B	Vizion - Linear Shape - 13.5W - 2700K - 80 CRI - 450mA - Constant Current - 22.88" x 0.94" - w/ On-board connector
TMU045018HL830A	Vizion - Linear Shape - 13.5W - 3000K - 80 CRI - 450mA - Constant Current - 22" x 0.94" - w/ On-board connector
TMU045018HL835A	Vizion - Linear Shape - 13.5W - 3500K - 80 CRI - 450mA - Constant Current - 22" x 0.94" - w/ On-board connector
TMU045018HL835B	Vizion - Linear Shape - 13.5W - 3500K - 80 CRI - 450mA - Constant Current - 22.88" x 0.94" - w/ On-board connector
TMU045018HL850A	Vizion - Linear Shape - 13.5W - 5000K - 80 CRI - 450mA - Constant Current - 22" x 0.94" - w/ On-board connector
TMU045018HL850B	Vizion - Linear Shape - 13.5W - 5000K - 80 CRI - 450mA - Constant Current - 22.88" x 0.94" - w/ On-board connector
TMU075007HL827A	Vizion - Linear Shape - 6.5W - 2700K - 80 CRI - 750 mA - Constant Current - 11" x 0.94" - w/ On-board connector
TMU075007HL830A	Vizion - Linear Shape - 6.5W - 3000K - 80 CRI - 750 mA - Constant Current - 11" x 0.94" - w/ On-board connector
TMU075007HL835A	Vizion - Linear Shape - 6.5W - 3500K - 80 CRI - 750 mA - Constant Current - 11" x 0.94" - w/ On-board connector
TMU075007HL850A	Vizion - Linear Shape - 6.5W - 5000K - 80 CRI - 750 mA - Constant Current - 11" x 0.94" - w/ On-board connector
TMU075014HL827A	Vizion - Linear Shape - 12.9W - 2700K - 80, 90 CRI - 750 mA - Constant Current - 18" x 0.94" - w/ On-board connector
TMU075014HL830A	Vizion - Linear Shape - 12.9W - 3000K - 80, 90 CRI - 750 mA - Constant Current - 18" x 0.94" - w/ On-board connector
TMU075014HL835A	Vizion - Linear Shape - 12.9W - 3500K - 80, 90 CRI - 750 mA - Constant Current - 18" x 0.94" - w/ On-board connector
TMU075014HL850A	Vizion - Linear Shape - 12.9W - 5000K - 80, 90 CRI - 750 mA - Constant Current - 18" x 0.94" - w/ On-board connector
TMU075019HL830A	Vizion - Linear Shape - 15W - 3000K - 80, 90 CRI - 750 mA - Constant Current - 18" x 0.94" - w/ On-board connector
TMU075019HL840A	Vizion - Linear Shape - 15W - 4000K - 80, 90 CRI - 750 mA - Constant Current - 18" x 0.94" - w/ On-board connector
TMU075019HL850A	Vizion - Linear Shape - 15W - 5000K - 80, 90 CRI - 750 mA - Constant Current - 18" x 0.94" - w/ On-board connector

Fluorescent Ballasts

FEP-210-600-L	SunHorse - 210V - for 1 x F79 (200W) T12HO; 2 x F59 (85W) - F72 (100W) T12HO; F72 (160W) - F79 (200W) T12VHO; 3 or 4 x F59 (85W) - F72 (100W) T12HO
FH11-UNV-750L-CEC	FireHorse 11 - Emergency Ballast - Universal Voltage - 750 Initial Lumen Output - with CEC Title 20 Compliance
IH3-UNV272T12HO	IceHorse 3 - Low Temp Ballast - Universal Voltage - (PS) - for T8HO / T12HO / T10VHO / T12VHO
LH1-120-L	LongHorse 1 - Versatile Remote Mount Ballasts - Instant Start - 120V - Linear Model w/ Side Leads
LH2-120-L	LongHorse 2 - Versatile Remote Mount Ballasts - Instant Start - 120V - Linear Model w/ Side Leads
LH3-277-L	LongHorse 3 - Versatile Remote Mount Ballasts - Instant Start - 277V - Linear Model w/ Side Leads
LH5-120-L	LongHorse 5 - Versatile Remote Mount Ballasts - Instant Start - 120V - Linear Model w/ Side Leads
LH6-120-L	LongHorse 6 - Versatile Remote Mount Ballasts - Instant Start - 120V - Linear Model w/ Side Leads
NPY-120-118-CFL	PONY - 120V - Rapid Start - for: 1 x 13W Twin; 18W Quad; or 18W Triple
NPY-120-126-CFL	PONY - 120V - Rapid Start - for: 1 x 18W or 24/27W Twin; or 26W Quad; or 26W or 32W Triple; or 22W T9 Circle
NPY-120-126-CR	PONY - 120V - Rapid Start - for: 1 x 22W T9 Circle (w/ Socket)

Fulham 2018 Holiday Overstock Sale

Orders must be received by December 21st. Contact Fulham for pricing

Model Number	Description
NPY-120-132-CFL	PONY - 120V - Rapid Start - for: 1 x F36/39 Twin; or 32W Triple, or 32W T9 Circle
NPY-120-132-CR	PONY - 120V - Rapid Start - for: 1 x 32W T9 Circle (w/ Socket)
NPY-120-154-T5	PONY - 120V - Rapid Start - for: 1 x F54 T5 HO
NPY-120-214-LT5	PONY - 120V - Rapid Start - for: 1 x F14 T5 or 2 x F14 T5
NPY-120-240-CR	PONY - 120V - Rapid Start - for: 1 x 22W + 32W T9 Circle; or 1 x 32W + 40W T9 Circle (w/ Socket)
RH14-UNV-235LT5	RaceHorse A - Program Preheat Start Ballast - Universal Voltage
RHA-UNV-218-BLS	RaceHorse A - CFL Ballast - Universal Voltage - (PS) - for 1 or 2 x 18W CFL - BLS Model
RHA-UNV-224-LT5	RaceHorse A - Linear Model - for 1 or 2 Lamp F24 T5HO (High Output) - w/ leads
RHA-UNV-228-LT5	RaceHorse A - Linear Model for 1 or 2 x F14; F21; or F28 T5HE (High Efficiency) - w/ leads
RHA-UNV-242-BLS	RaceHorse A - CFL Ballast - Universal Voltage - (PS) - for 1 or 2 x 42W CFL - BLS Model
RHA-UNV-454-LT5	RaceHorse A - for 3 or 4 Lamp F54 T5HO (High Output) - w/ leads
SC-120-115-T8XL	PONY SUGAR CUBE - 120V - Rapid Start - for: 1 x F14 or F15 T8; or 1 x F14 or F15 T12
SC-120-118-CFL	PONY SUGAR CUBE - 120V - Rapid Start - for: 1 x 18W Quad (CFQ/E) or Triple (CFTR/E)
SC-120-118-CTW	PONY SUGAR CUBE - 120V - Rapid Start - for: 1 x 18W Twin (CFT/E)
SC-120-120-CT12	PONY SUGAR CUBE - 120V - Rapid Start - for: 1 x F20 T12
SC-120-125-LT8	PONY SUGAR CUBE - 120V - Rapid Start - for: 1 x F17 or F25 T8
SC-120-213-T5XL	PONY SUGAR CUBE - 120V - Rapid Start - for: 1 x F8 + F13 T5; or F21 T5; or 2 x F8 or F13 or F14 T5 - Extended Case
SC-230-113-CFL	PONY SUGAR CUBE - High Frequency Electronic - Rapid Start Ballast
SHS14-UNV-H	SunHorse - Universal Voltage (120V-277V) - for 1 or 2 x G64 T5L;4P
SHS15-UNV-H	SunHorse - Universal Voltage (120V-277V) - for 1 or 2 x GH064 T5/L/4PSE (155W) (Light Sources or Atlantic)
WH11-120-L	WorkHorse 11- Versatile Fluorescent Ballast - Instant Start - 120V - Linear Model w/ Side Leads- with LAMP ALERT
WH3-230-L	WorkHorse 3 - Versatile Fluorescent Ballast - Instant Start - 230V - Linear Model w/ Side Leads
WH3-277-BLS	WorkHorse 3 - Versatile Fluorescent Ballast - Instant Start - 277V - Compact Model w/ Bottom Leads & Mounting Studs
WH41-UNV-C	WorkHorse 41 - Universal Voltage - Versatile Fluorescent Ballast - Instant Start - Compact Model with Side Leads
WH42-UNV-L	WorkHorse 42 - Universal Voltage - Versatile Fluorescent Ballast - Instant Start - Parallel Lamp Operation.
WH44-UNV-L	WorkHorse 44 - Universal Voltage - Versatile Fluorescent Ballast - Instant Start - Linear Model with Side Leads
WH6-277-L	WorkHorse 6 - Versatile Fluorescent Ballast - Instant Start - 277V - Linear Model w/ Side Leads
WHCG3-120-T8-IS	WorkHorse Commercial Grade Series Electronic Ballast - Drop In Replacement for Magnetic Ballast - Parallel Lamp Operation - THD Less Than 10%
WHPS1-UNV-T8-PS	WorkHorse Program Start - 1 lamp T8 - Universal Voltage - Program Start (PS) - Linear Model
WHPS2-UNV-T8-PS	WorkHorse Program Start - 2 lamp T8 - Universal Voltage - Program Start (PS) - Linear Model
WHSG4-UNV-T8-LB	WorkHorse Specifier Grade - 4 lamp T8 - Universal Voltage - IS - <10%THD - Low Ballast Factor
WHSG7-UNV-T12HO	WorkHorse Specifier Grade - 1 or 2 lamp - Universal Voltage - T12HO - <10%THD - w/ Magnetic Footprint

Fluorescent Lamps

FLFT513W827	Linear Fluorescent T5 Lamp - 8W - 80CRI -2700K - Mini Bipin Appliance Lamps
FLFT514W830	Linear Fluorescent T5HE Lamp - 14W - 80CRI - 3000K - w/ (G5) Min Bi-Pin Connectors
FLFT514W841	Linear Fluorescent T5HE Lamp - 14W - 80CRI - 4100K - w/ (G5) Min Bi-Pin Connectors

Fulham 2018 Holiday Overstock Sale

Orders must be received by December 21st. Contact Fulham for pricing

Model Number	Description
FLFT514W850	Linear Fluorescent T5HE Lamp - 14W - 80CRI - 5000K - w/ (G5) Min Bi-Pin Connectors
FLFT514W865	Linear Fluorescent T5HE Lamp - 14W - 80CRI - 6500K - w/ (G5) Min Bi-Pin Connectors
FLFT521W830	Linear Fluorescent T5HE Lamp - 21W - 80CRI - 3000K - w/ (G5) Min Bi-Pin Connectors
FLFT521W841	Linear Fluorescent T5HE Lamp - 21W - 80CRI - 4100K - w/ (G5) Min Bi-Pin Connectors
FLFT58W841	Linear Fluorescent T5 Lamp - 8W - 80CRI - 4100K - w/ (G5) Min Bi-Pin Connectors
FLFT58W865	Linear Fluorescent T5 Lamp - 8W - 80CRI - 6500K - w/ Mini Bipin Appliance Lamps
FLFT5EH24W835	Linear Fluorescent T5HO Lamp - 24W - 80CRI - 3500K - w/ (G5) Min Bi-Pin Connectors
FLFT5EH24W841	Linear Fluorescent T5HO Lamp - 24W - 80CRI - 4100K - w/ (G5) Min Bi-Pin Connectors
FLFT5EH39W830	Linear Fluorescent T5HO Lamp - 39W - 80CRI - 3000K - w/ (G5) Min Bi-Pin Connectors
FLFT5EH39W835	Linear Fluorescent T5HO Lamp - 39W - 80CRI - 3500K - w/ (G5) Min Bi-Pin Connectors
FLFT5EH54W830	Linear Fluorescent T5HO Lamp - 54W - 80CRI - 3000K - w/ (G5) Min Bi-Pin Connectors
FLFT5EH54W841	Linear Fluorescent T5HO Lamp - 54W - 80CRI - 4100K - w/ (G5) Min Bi-Pin Connectors
FLFT5EH54W865	Linear Fluorescent T5HO Lamp - 54W - 80CRI - 6500K - w/ (G5) Min Bi-Pin Connectors
FLFT5EV95W830	Linear Fluorescent T5VHO Lamp - 95W - 80CRI - 3000K - w/ (G5) Min Bi-Pin Connectors
Exit Signs and Accessories	
FHEC31BR	FireHorse - Exit and Emergency Light Combo - Standard LED with Low Voltage Heads - Black Housing - Red Letters
FHEC34RRC	FireHorse - Exit and Emergency Light Combo - Slim Wet Location Exit Emergency Combo - Red Letters - Remote Capable
FHEM10RH13V1	FireHorse - Emergency Lighting - Single Remote Head - 3V - 1W - for FHEM10 LED Mini Emergency Light
FHEM10RH23V1	FireHorse - Emergency Lighting - Dual Remote Head - 3V - 1W - for FHEM10 LED Mini Emergency Light
FHEM11B	FireHorse - Emergency Lighting - General Emergency Light - Black - 6V - 7W - for FHEM11 Adjustable Emergency Lighting Unit
FHEM11RH16V5	FireHorse - Emergency Lighting - Single Remote Head - 6V - 5.4W - White - for FHEM11 General Emergency Light
FHEM11WH	FireHorse - Emergency Lighting - General Emergency Light - White - w/ High Lumen Reflector
FHEM11WRC	FireHorse - Emergency Lighting - General Emergency Light - White - Remote Capable
FHEM11WSD	FireHorse - Emergency Lighting - General Emergency Light - White - Self Diagnostic
FHEM15RH16V7	FireHorse - Emergency Lighting - Single Remote Head - 6V - 7.2W - for FHEM15 Wet Location Emergency Light
FHEM15RH26V7	FireHorse - Emergency Lighting - Dual Remote Head - 6V - 7.2W - for FHEM15 Wet Location Emergency Light
FHEX21BGAC	FireHorse - Emergency Exit Sign - Thin Profile LED - Black housing - Green Letters - AC Only
FHEX21WREMSD	FireHorse - Emergency Exit Sign - Thin Profile LED - White housing - Green Letters - Battery Backup - Self Diagnostic
FHEX23ADRAC	FireHorse - Emergency Exit Sign - LED Recessed Edge-Lit - Aluminum Housing - Dual Face - Red Letters - AC Only
FHEX23ADREMSD	FireHorse - Emergency Exit Sign - LED Recessed Edge-Lit - Aluminum Housing - Dual Face - Red Letters - Battery Backup - Self Diagnostic
FHEX23ASRAC	FireHorse - Emergency Exit Sign - LED Recessed Edge-Lit - Aluminum Housing - Single Face - Red Letters - AC Only
FHEX23ASREM	FireHorse - Emergency Exit Sign - LED Recessed Edge-Lit - Aluminum Housing - Single Face - Red Letters - Battery Backup
FHEX24ADGAC	FireHorse - Emergency Exit Sign - LED Edge-Lit - Aluminum Housing - Dual Face - Green Letters - AC Only
FHNY20EM	FireHorse - NYC Approved Exit Sign - LED w/ Heavy Duty Steel Housing - Universal Face - Red Letters - Battery Backup
FLPL10SG	FireHorse - FreeLite - Photoluminescent Exit Sign - 100 FT Visibility - Single Face - Green Background

Fulham 2018 Holiday Overstock Sale

Orders must be received by December 21st. Contact Fulham for pricing

Model Number	Description
FLPL10SR	FireHorse - FreeLite - Photoluminescent Exit Sign - 100 FT Visibility - Single Face - Red Background
FLPL75SG	FireHorse - FreeLite - Photoluminescent Exit Sign - 75 FT Visibility - Single Face - Green Background
FLPLF10B	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Frame for 100' signs - Black
FLPLF10G	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Frame for 100' signs - Green
FLPLF10R	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Frame for 100' signs - Red
FLPLFUS	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Frame for 50' & 75' signs - Silver
FLPLFUW	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Frame for 50' & 75' signs - White
FLPLMB10B	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Universal Mounting Bracket for 100' framed signs - Black
FLPLMB10G	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Universal Mounting Bracket for 100' framed signs - Green
FLPLMB10W	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Universal Mounting Bracket for 100' framed signs- White
FLPLMBB	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Universal Mounting Bracket for 50' and 75' framed signs - Black
FLPLMBG	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Universal Mounting Bracket for 50' and 75' framed signs - Green
FLPLMBR	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Universal Mounting Bracket for 50' and 75' framed signs - Red
FLPLMBS	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Universal Mounting Bracket for 50' and 75' framed signs - Silver
FLPLMBW	FireHorse - FreeLite - Photoluminescent Exit Sign Accessory - Universal Mounting Bracket for 50' and 75' framed signs - White

Other Products

H5-UNV-70HBC	HighHorse Low Frequency Electronic HID MH Ballast - Universal Voltage - 70W - w/ backside leads (ANSI - M98/ M139/ C139/ M143)
HSM-UNV-142-C	CFL - 0-10V Dimming Ballast - Universal Voltage - for 1 x CFTR42W, FT40W, FT36W, FC9T5, FC12T5
PET-120-12-60	PONY Electronic Low Voltage Step Down Transformer - 120V AC --> 12V - 60W
PET-120-12150WL	PONY Electronic Low Voltage Step Down Transformer - 120V AC --> 12V - 150W
PET-120-12300WL	PONY Electronic Low Voltage Step Down Transformer - 120V AC --> 12V - 300W - Linear Case