

Description: 0.35A, 60W Constant Current LED Driver. Universal input range of 120-277VAC.
One 0.35A independent, constant current output channel.


This Driver Will Operate The Following LED Modules:

Any LED module designed to accept constant current input of 0.35A and has a maximum input voltage of 180V.

ELECTRICAL DATA

Input Voltage	120-277VAC, 50/60Hz
Input Current	0.55A@100V, 0.24A@277V
Input Power	75W
Power Factor	>0.9
THD	<20%
Driver Type	Constant Current
Output Current	0.35A
Output Voltage Range	90-180VDC
Output Wattage	60W
Number of Output Channels	1
RFI/EMI	FCC PART 15B CONSUMER, EN55015
Output Type	NON-CLASS 2
Ambient Operating Temperature Range	-20°C to 65°C
Max Case Temperature at Tc	90°C
Sound Rating	A
Protections	Input Surge Protection
	Input Current Protection
	Output Short Circuit Protection
	Output Open Circuit Protection
	Output To Ground Short Protection
	Overload Protection
Expected Service Life	5 YEARS
Approvals / Class	cURus NON-Class 2, IP64, CE, RoHS, Dry or Damp Locations, Type TL/HL

MECHANICAL DATA

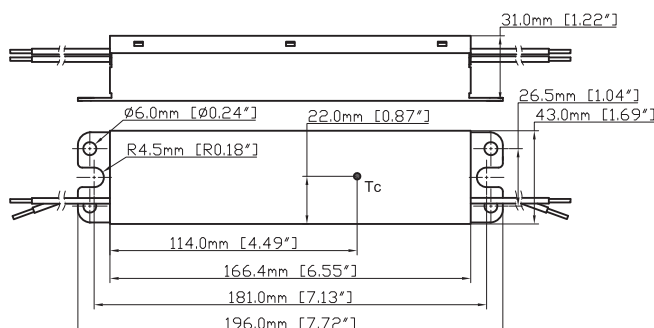

WIRING DIAGRAMS

INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH
WHITE	330mm [13"]	RED	330mm [13"]
BLACK	330mm [13"]	BLUE	330mm [13"]



Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.